

☐ Preliminary Specification
☒ Final Specification

Module	24.0" Color TFT-LCD
Model Name	G240HVN01.0



Company	
Checked & Approved by	Date

Approved by	Date
Elsie Kuo	2025/07/01
Prepared by	
Felix Lee	2025/07/01
General Display Business Unit / AUO Display Plus Corporation	

Contents



1. Operating Precautions	7
2. General Description.....	8
2.1 Display Characteristics	8
2.2 Optical Characteristics	9
3. Functional Block Diagram.....	12
4. Absolute Maximum Ratings	13
4.1 TFT LCD Module	13
4.2 Backlight Unit	13
4.3 Absolute Ratings of Environment	13
5. Electrical Characteristics	14
5.1 TFT LCD Module	14
5.2 Backlight Unit	16
6. Signal Characteristic	17
6.1 Pixel Format Image	17
6.2 Signal Description	18
6.3 The Input Data Format	19
6.4 Interface Timing.....	20
6.5 Power ON/OFF Sequence	21
7. Connector & Pin Assignment.....	22
7.1 TFT LCD Module: LVDS Connector	22
7.2 Backlight Unit: LED Connector	23
8. Reliability Test	24
9. Mechanical Characteristics.....	25
10. Label and Packaging	27
10.1 Shipping Label (on the rear side of TFT-LCD display)	27
10.2 Carton Package	27
11. Safety.....	28
11.1 Sharp Edge Requirements	28
11.2 Materials	28
11.3 Capacitors	28
11.4 International Safety Standard Compliance	28

Record of Revision

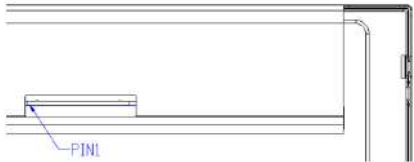Version and Date	Page	Old description	New Description	Remark																																																																																																																																																																																																																																																																																																						
0.1 2023/05/02	All	First Edition for Customer	All																																																																																																																																																																																																																																																																																																							
0.2 2023/07/18	6	2.2 Optical Characteristics The optical characteristics are measured under stable conditions at 25°C (Room Temperature). <table><tr><th>Item</th><th>Unit</th><th>Conditions</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Note</th></tr><tr><td>White Luminance</td><td>[cd/m²]</td><td>I_W = 50 mA</td><td>1200</td><td>1500</td><td>—</td><td>1</td></tr></table>	Item	Unit	Conditions	Min.	Typ.	Max.	Note	White Luminance	[cd/m ²]	I _W = 50 mA	1200	1500	—	1	2.2 Optical Characteristics The optical characteristics are measured under stable conditions at 25°C (Room Temperature). <table><tr><th>Item</th><th>Unit</th><th>Conditions</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Note</th></tr><tr><td>White Luminance</td><td>[cd/m²]</td><td>I_W = 91 mA</td><td>1200</td><td>1500</td><td>—</td><td>1</td></tr></table>	Item	Unit	Conditions	Min.	Typ.	Max.	Note	White Luminance	[cd/m ²]	I _W = 91 mA	1200	1500	—	1																																																																																																																																																																																																																																																																											
Item	Unit	Conditions	Min.	Typ.	Max.	Note																																																																																																																																																																																																																																																																																																				
White Luminance	[cd/m ²]	I _W = 50 mA	1200	1500	—	1																																																																																																																																																																																																																																																																																																				
Item	Unit	Conditions	Min.	Typ.	Max.	Note																																																																																																																																																																																																																																																																																																				
White Luminance	[cd/m ²]	I _W = 91 mA	1200	1500	—	1																																																																																																																																																																																																																																																																																																				
	13	5.2 Backlight Unit *5.2.1 LED Driver Following characteristics are measured under stable condition at 25°C (Room Temperature). <table><tr><th>Symbol</th><th>Parameter</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Units</th><th>Remark</th></tr><tr><td>V_{IN}</td><td>Input Voltage</td><td>—</td><td>—</td><td>—</td><td>V_{IN}</td><td>—</td></tr><tr><td>I_{IN}</td><td>Input Current</td><td>—</td><td>2.2</td><td>—</td><td>A</td><td>100% Dimming</td></tr><tr><td>P_{LED}</td><td>Power Consumption</td><td>—</td><td>26.2</td><td>—</td><td>Watt</td><td>100% Dimming</td></tr><tr><td>I_{INrush}</td><td>Inrush Current</td><td>—</td><td>4</td><td>5</td><td>A</td><td>—</td></tr><tr><td>B_{1_ON}</td><td>ON Control Voltage</td><td>3</td><td>—</td><td>5.5</td><td>V_{ON}</td><td>—</td></tr><tr><td>B_{1_OFF}</td><td>OFF Control Voltage</td><td>0</td><td>—</td><td>0.5</td><td>V_{OFF}</td><td>—</td></tr><tr><td>F_{DM}</td><td>PWM Dimming Frequency</td><td>200</td><td>—</td><td>20K</td><td>Hz</td><td>—</td></tr><tr><td>V_{DM}</td><td>High Voltage</td><td>5.0</td><td>5.5</td><td>5.5</td><td>V_{DM}</td><td>—</td></tr><tr><td>V_{DM}</td><td>Low Voltage</td><td>0</td><td>—</td><td>0.5</td><td>V_{DM}</td><td>—</td></tr><tr><td>Duty</td><td>Dimming Duty 200Hz-60Hz</td><td>0</td><td>—</td><td>100</td><td>%</td><td>—</td></tr><tr><td>Duty</td><td>Dimming Duty 50Hz-200Hz</td><td>15</td><td>—</td><td>100</td><td>%</td><td>—</td></tr><tr><td>I_F</td><td>LED Forward Current</td><td>—</td><td>30</td><td>—</td><td>mA</td><td>T_a = 25°C</td></tr><tr><td>t_{LED}</td><td>LED Life Time</td><td>50,000</td><td>—</td><td>—</td><td>hrs</td><td>Note 4</td></tr></table>	Symbol	Parameter	Min.	Typ.	Max.	Units	Remark	V _{IN}	Input Voltage	—	—	—	V _{IN}	—	I _{IN}	Input Current	—	2.2	—	A	100% Dimming	P _{LED}	Power Consumption	—	26.2	—	Watt	100% Dimming	I _{INrush}	Inrush Current	—	4	5	A	—	B _{1_ON}	ON Control Voltage	3	—	5.5	V _{ON}	—	B _{1_OFF}	OFF Control Voltage	0	—	0.5	V _{OFF}	—	F _{DM}	PWM Dimming Frequency	200	—	20K	Hz	—	V _{DM}	High Voltage	5.0	5.5	5.5	V _{DM}	—	V _{DM}	Low Voltage	0	—	0.5	V _{DM}	—	Duty	Dimming Duty 200Hz-60Hz	0	—	100	%	—	Duty	Dimming Duty 50Hz-200Hz	15	—	100	%	—	I _F	LED Forward Current	—	30	—	mA	T _a = 25°C	t _{LED}	LED Life Time	50,000	—	—	hrs	Note 4	<table><tr><td>I_F</td><td>LED Forward Current</td><td>—</td><td>30</td><td>—</td><td>mA</td><td>T_a = 25°C</td></tr></table>	I _F	LED Forward Current	—	30	—	mA	T _a = 25°C																																																																																																																																																																																														
Symbol	Parameter	Min.	Typ.	Max.	Units	Remark																																																																																																																																																																																																																																																																																																				
V _{IN}	Input Voltage	—	—	—	V _{IN}	—																																																																																																																																																																																																																																																																																																				
I _{IN}	Input Current	—	2.2	—	A	100% Dimming																																																																																																																																																																																																																																																																																																				
P _{LED}	Power Consumption	—	26.2	—	Watt	100% Dimming																																																																																																																																																																																																																																																																																																				
I _{INrush}	Inrush Current	—	4	5	A	—																																																																																																																																																																																																																																																																																																				
B _{1_ON}	ON Control Voltage	3	—	5.5	V _{ON}	—																																																																																																																																																																																																																																																																																																				
B _{1_OFF}	OFF Control Voltage	0	—	0.5	V _{OFF}	—																																																																																																																																																																																																																																																																																																				
F _{DM}	PWM Dimming Frequency	200	—	20K	Hz	—																																																																																																																																																																																																																																																																																																				
V _{DM}	High Voltage	5.0	5.5	5.5	V _{DM}	—																																																																																																																																																																																																																																																																																																				
V _{DM}	Low Voltage	0	—	0.5	V _{DM}	—																																																																																																																																																																																																																																																																																																				
Duty	Dimming Duty 200Hz-60Hz	0	—	100	%	—																																																																																																																																																																																																																																																																																																				
Duty	Dimming Duty 50Hz-200Hz	15	—	100	%	—																																																																																																																																																																																																																																																																																																				
I _F	LED Forward Current	—	30	—	mA	T _a = 25°C																																																																																																																																																																																																																																																																																																				
t _{LED}	LED Life Time	50,000	—	—	hrs	Note 4																																																																																																																																																																																																																																																																																																				
I _F	LED Forward Current	—	30	—	mA	T _a = 25°C																																																																																																																																																																																																																																																																																																				
	19																																																																																																																																																																																																																																																																																																									
0.3 2023/09/07	11	5. Electrical Characteristics 5.1 TFT LCD Module *5.1.1 Power Specification <table><tr><th>Symbol</th><th>Parameter</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Units</th><th>Remark</th></tr><tr><td>V_{DD}</td><td>Logic/LCD Drive Voltage</td><td>10.8</td><td>12</td><td>13.2</td><td>[V_{DD}]</td><td>±10%</td></tr><tr><td>I_{DD}</td><td>VDD Current</td><td>—</td><td>TBD</td><td>TBD</td><td>[mA]</td><td>V_{DD}= 12V, All White Pattern At 60Hz</td></tr><tr><td>I_{INrush}</td><td>LCD Inrush Current</td><td>—</td><td>—</td><td>3</td><td>[A]</td><td>Note 1</td></tr><tr><td>P_{DD}</td><td>VDD Power</td><td>—</td><td>TBD</td><td>TBD</td><td>[Watt]</td><td>V_{DD}= 12V, All White Pattern At 60Hz</td></tr></table>	Symbol	Parameter	Min.	Typ.	Max.	Units	Remark	V _{DD}	Logic/LCD Drive Voltage	10.8	12	13.2	[V _{DD}]	±10%	I _{DD}	VDD Current	—	TBD	TBD	[mA]	V _{DD} = 12V, All White Pattern At 60Hz	I _{INrush}	LCD Inrush Current	—	—	3	[A]	Note 1	P _{DD}	VDD Power	—	TBD	TBD	[Watt]	V _{DD} = 12V, All White Pattern At 60Hz	5. Electrical Characteristics 5.1 TFT LCD Module *5.1.1 Power Specification <table><tr><th>Symbol</th><th>Parameter</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Units</th><th>Remark</th></tr><tr><td>V_{DD}</td><td>Logic/LCD Drive Voltage</td><td>10.8</td><td>12</td><td>13.2</td><td>[V_{DD}]</td><td>±10%</td></tr><tr><td>I_{DD}</td><td>VDD Current</td><td>—</td><td>405</td><td>416.6</td><td>[mA]</td><td>V_{DD}= 12V, All White Pattern At 60Hz</td></tr><tr><td>I_{INrush}</td><td>LCD Inrush Current</td><td>—</td><td>—</td><td>3</td><td>[A]</td><td>Note 1</td></tr><tr><td>P_{DD}</td><td>VDD Power</td><td>—</td><td>4.9</td><td>5</td><td>[Watt]</td><td>V_{DD}= 12V, All White Pattern At 60Hz</td></tr></table>	Symbol	Parameter	Min.	Typ.	Max.	Units	Remark	V _{DD}	Logic/LCD Drive Voltage	10.8	12	13.2	[V _{DD}]	±10%	I _{DD}	VDD Current	—	405	416.6	[mA]	V _{DD} = 12V, All White Pattern At 60Hz	I _{INrush}	LCD Inrush Current	—	—	3	[A]	Note 1	P _{DD}	VDD Power	—	4.9	5	[Watt]	V _{DD} = 12V, All White Pattern At 60Hz																																																																																																																																																																																																																																	
Symbol	Parameter	Min.	Typ.	Max.	Units	Remark																																																																																																																																																																																																																																																																																																				
V _{DD}	Logic/LCD Drive Voltage	10.8	12	13.2	[V _{DD}]	±10%																																																																																																																																																																																																																																																																																																				
I _{DD}	VDD Current	—	TBD	TBD	[mA]	V _{DD} = 12V, All White Pattern At 60Hz																																																																																																																																																																																																																																																																																																				
I _{INrush}	LCD Inrush Current	—	—	3	[A]	Note 1																																																																																																																																																																																																																																																																																																				
P _{DD}	VDD Power	—	TBD	TBD	[Watt]	V _{DD} = 12V, All White Pattern At 60Hz																																																																																																																																																																																																																																																																																																				
Symbol	Parameter	Min.	Typ.	Max.	Units	Remark																																																																																																																																																																																																																																																																																																				
V _{DD}	Logic/LCD Drive Voltage	10.8	12	13.2	[V _{DD}]	±10%																																																																																																																																																																																																																																																																																																				
I _{DD}	VDD Current	—	405	416.6	[mA]	V _{DD} = 12V, All White Pattern At 60Hz																																																																																																																																																																																																																																																																																																				
I _{INrush}	LCD Inrush Current	—	—	3	[A]	Note 1																																																																																																																																																																																																																																																																																																				
P _{DD}	VDD Power	—	4.9	5	[Watt]	V _{DD} = 12V, All White Pattern At 60Hz																																																																																																																																																																																																																																																																																																				
	5	2.1 Display Characteristics The following items are characteristics summary on the table under 25°C condition. <table><tr><th>ITEMS</th><th>Unit</th><th>SPECIFICATIONS</th></tr><tr><td>Screen Diagonal</td><td>[mm]</td><td>606.7(24.0")</td></tr><tr><td>Active Area</td><td>[mm]</td><td>531.36 (H) x 298.65 (V)</td></tr><tr><td>Pixels H x V</td><td>—</td><td>1500(x) x 1080(y)</td></tr><tr><td>Pixel Pitch</td><td>[mm]</td><td>276.75 (per one line) x 276.75</td></tr><tr><td>Pixel Arrangement</td><td>—</td><td>R.G.B. Vertical Stripe</td></tr><tr><td>Display Mode</td><td>—</td><td>VA Mode, Normally Black</td></tr><tr><td>White Luminance (Center)</td><td>[cd/m²]</td><td>1500</td></tr><tr><td>Contrast Ratio</td><td>—</td><td>3000:1</td></tr><tr><td>Optical Response Time</td><td>[ms]</td><td>TBD</td></tr><tr><td>Nominal Input Voltage V_{DD}</td><td>[V]</td><td>+12.0 V</td></tr><tr><td>Power Consumption</td><td>[Watt]</td><td>62.2 W (Cell: 0.8 x 0.8, 62.4) (Typ)@White; 75.9 W (Cell: 5.0 x 5.0, 74.9) (Max)@White</td></tr></table>	ITEMS	Unit	SPECIFICATIONS	Screen Diagonal	[mm]	606.7(24.0")	Active Area	[mm]	531.36 (H) x 298.65 (V)	Pixels H x V	—	1500(x) x 1080(y)	Pixel Pitch	[mm]	276.75 (per one line) x 276.75	Pixel Arrangement	—	R.G.B. Vertical Stripe	Display Mode	—	VA Mode, Normally Black	White Luminance (Center)	[cd/m ²]	1500	Contrast Ratio	—	3000:1	Optical Response Time	[ms]	TBD	Nominal Input Voltage V _{DD}	[V]	+12.0 V	Power Consumption	[Watt]	62.2 W (Cell: 0.8 x 0.8, 62.4) (Typ)@White; 75.9 W (Cell: 5.0 x 5.0, 74.9) (Max)@White	2.1 Display Characteristics The following items are characteristics summary on the table under 25°C condition. <table><tr><th>ITEMS</th><th>Unit</th><th>SPECIFICATIONS</th></tr><tr><td>Screen Diagonal</td><td>[mm]</td><td>606.7(24.0")</td></tr><tr><td>Active Area</td><td>[mm]</td><td>531.36 (H) x 298.65 (V)</td></tr><tr><td>Pixels H x V</td><td>—</td><td>1500(x) x 1080(y)</td></tr><tr><td>Pixel Pitch</td><td>[mm]</td><td>276.75 (per one line) x 276.75</td></tr><tr><td>Pixel Arrangement</td><td>—</td><td>R.G.B. Vertical Stripe</td></tr><tr><td>Display Mode</td><td>—</td><td>VA Mode, Normally Black</td></tr><tr><td>White Luminance (Center)</td><td>[cd/m²]</td><td>1500</td></tr><tr><td>Contrast Ratio</td><td>—</td><td>3000:1</td></tr><tr><td>Optical Response Time</td><td>[ms]</td><td>TBD</td></tr><tr><td>Nominal Input Voltage V_{DD}</td><td>[V]</td><td>+12.0 V</td></tr><tr><td>Power Consumption</td><td>[Watt]</td><td>62.2 W (Cell: 0.8 x 0.8, 62.4) (Typ)@White</td></tr></table>	ITEMS	Unit	SPECIFICATIONS	Screen Diagonal	[mm]	606.7(24.0")	Active Area	[mm]	531.36 (H) x 298.65 (V)	Pixels H x V	—	1500(x) x 1080(y)	Pixel Pitch	[mm]	276.75 (per one line) x 276.75	Pixel Arrangement	—	R.G.B. Vertical Stripe	Display Mode	—	VA Mode, Normally Black	White Luminance (Center)	[cd/m ²]	1500	Contrast Ratio	—	3000:1	Optical Response Time	[ms]	TBD	Nominal Input Voltage V _{DD}	[V]	+12.0 V	Power Consumption	[Watt]	62.2 W (Cell: 0.8 x 0.8, 62.4) (Typ)@White																																																																																																																																																																																																																															
ITEMS	Unit	SPECIFICATIONS																																																																																																																																																																																																																																																																																																								
Screen Diagonal	[mm]	606.7(24.0")																																																																																																																																																																																																																																																																																																								
Active Area	[mm]	531.36 (H) x 298.65 (V)																																																																																																																																																																																																																																																																																																								
Pixels H x V	—	1500(x) x 1080(y)																																																																																																																																																																																																																																																																																																								
Pixel Pitch	[mm]	276.75 (per one line) x 276.75																																																																																																																																																																																																																																																																																																								
Pixel Arrangement	—	R.G.B. Vertical Stripe																																																																																																																																																																																																																																																																																																								
Display Mode	—	VA Mode, Normally Black																																																																																																																																																																																																																																																																																																								
White Luminance (Center)	[cd/m ²]	1500																																																																																																																																																																																																																																																																																																								
Contrast Ratio	—	3000:1																																																																																																																																																																																																																																																																																																								
Optical Response Time	[ms]	TBD																																																																																																																																																																																																																																																																																																								
Nominal Input Voltage V _{DD}	[V]	+12.0 V																																																																																																																																																																																																																																																																																																								
Power Consumption	[Watt]	62.2 W (Cell: 0.8 x 0.8, 62.4) (Typ)@White; 75.9 W (Cell: 5.0 x 5.0, 74.9) (Max)@White																																																																																																																																																																																																																																																																																																								
ITEMS	Unit	SPECIFICATIONS																																																																																																																																																																																																																																																																																																								
Screen Diagonal	[mm]	606.7(24.0")																																																																																																																																																																																																																																																																																																								
Active Area	[mm]	531.36 (H) x 298.65 (V)																																																																																																																																																																																																																																																																																																								
Pixels H x V	—	1500(x) x 1080(y)																																																																																																																																																																																																																																																																																																								
Pixel Pitch	[mm]	276.75 (per one line) x 276.75																																																																																																																																																																																																																																																																																																								
Pixel Arrangement	—	R.G.B. Vertical Stripe																																																																																																																																																																																																																																																																																																								
Display Mode	—	VA Mode, Normally Black																																																																																																																																																																																																																																																																																																								
White Luminance (Center)	[cd/m ²]	1500																																																																																																																																																																																																																																																																																																								
Contrast Ratio	—	3000:1																																																																																																																																																																																																																																																																																																								
Optical Response Time	[ms]	TBD																																																																																																																																																																																																																																																																																																								
Nominal Input Voltage V _{DD}	[V]	+12.0 V																																																																																																																																																																																																																																																																																																								
Power Consumption	[Watt]	62.2 W (Cell: 0.8 x 0.8, 62.4) (Typ)@White																																																																																																																																																																																																																																																																																																								
	6	2.2 Optical Characteristics The optical characteristics are measured under stable conditions at 25°C (Room Temperature). <table><tr><th>Item</th><th>Unit</th><th>Conditions</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Note</th></tr><tr><td>White Luminance</td><td>[cd/m²]</td><td>I_W = 91 mA</td><td>1200</td><td>1500</td><td>—</td><td>1</td></tr><tr><td>Uniformity</td><td>%</td><td>9 Points</td><td>75</td><td>80</td><td>—</td><td>1, 2, 3</td></tr><tr><td>Contrast Ratio</td><td>—</td><td>—</td><td>3000</td><td>5000</td><td>—</td><td>4</td></tr><tr><td>Cross talk</td><td>—</td><td>—</td><td>TBD</td><td>—</td><td>—</td><td>5</td></tr><tr><td>Response Time</td><td>[ms]</td><td>Rising</td><td>—</td><td>TBD</td><td>—</td><td>6</td></tr><tr><td></td><td></td><td>Falling</td><td>—</td><td>TBD</td><td>—</td><td></td></tr><tr><td></td><td></td><td>Rising + Falling</td><td>—</td><td>TBD</td><td>—</td><td></td></tr><tr><td>Viewing Angle</td><td>[degree]</td><td>Horizontal (Right)</td><td>—</td><td>85</td><td>—</td><td>7</td></tr><tr><td></td><td></td><td>Horizontal (Left)</td><td>—</td><td>85</td><td>—</td><td></td></tr><tr><td></td><td></td><td>Vertical (Upper)</td><td>—</td><td>80</td><td>—</td><td></td></tr><tr><td></td><td></td><td>Vertical (Lower)</td><td>—</td><td>80</td><td>—</td><td></td></tr><tr><td>Color / Chromaticity Coordinates (CIE 1931)</td><td>—</td><td>Red x¹</td><td>TBD</td><td>TBD</td><td>TBD</td><td>—</td></tr><tr><td></td><td></td><td>Red y¹</td><td>TBD</td><td>TBD</td><td>TBD</td><td>—</td></tr><tr><td></td><td></td><td>Green x¹</td><td>TBD</td><td>TBD</td><td>TBD</td><td>—</td></tr><tr><td></td><td></td><td>Green y¹</td><td>TBD</td><td>TBD</td><td>TBD</td><td>—</td></tr><tr><td></td><td></td><td>Blue x¹</td><td>TBD</td><td>TBD</td><td>TBD</td><td>—</td></tr><tr><td></td><td></td><td>Blue y¹</td><td>TBD</td><td>TBD</td><td>TBD</td><td>—</td></tr><tr><td></td><td></td><td>White x¹</td><td>0.265</td><td>0.313</td><td>0.350</td><td>—</td></tr><tr><td></td><td></td><td>White y¹</td><td>0.275</td><td>0.325</td><td>0.375</td><td>—</td></tr><tr><td>Color Gamut</td><td>%</td><td>—</td><td>—</td><td>72</td><td>—</td><td>—</td></tr></table>	Item	Unit	Conditions	Min.	Typ.	Max.	Note	White Luminance	[cd/m ²]	I _W = 91 mA	1200	1500	—	1	Uniformity	%	9 Points	75	80	—	1, 2, 3	Contrast Ratio	—	—	3000	5000	—	4	Cross talk	—	—	TBD	—	—	5	Response Time	[ms]	Rising	—	TBD	—	6			Falling	—	TBD	—				Rising + Falling	—	TBD	—		Viewing Angle	[degree]	Horizontal (Right)	—	85	—	7			Horizontal (Left)	—	85	—				Vertical (Upper)	—	80	—				Vertical (Lower)	—	80	—		Color / Chromaticity Coordinates (CIE 1931)	—	Red x ¹	TBD	TBD	TBD	—			Red y ¹	TBD	TBD	TBD	—			Green x ¹	TBD	TBD	TBD	—			Green y ¹	TBD	TBD	TBD	—			Blue x ¹	TBD	TBD	TBD	—			Blue y ¹	TBD	TBD	TBD	—			White x ¹	0.265	0.313	0.350	—			White y ¹	0.275	0.325	0.375	—	Color Gamut	%	—	—	72	—	—	2.2 Optical Characteristics The optical characteristics are measured under stable conditions at 25°C (Room Temperature). <table><tr><th>Item</th><th>Unit</th><th>Conditions</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Note</th></tr><tr><td>White Luminance</td><td>[cd/m²]</td><td>I_W = 91 mA</td><td>1200</td><td>1500</td><td>—</td><td>1</td></tr><tr><td>Uniformity</td><td>%</td><td>9 Points</td><td>75</td><td>80</td><td>—</td><td>1, 2, 3</td></tr><tr><td>Contrast Ratio</td><td>—</td><td>—</td><td>3000</td><td>5000</td><td>—</td><td>4</td></tr><tr><td>Cross talk</td><td>—</td><td>—</td><td>—</td><td>—</td><td>1.5</td><td>5</td></tr><tr><td>Response Time</td><td>[ms]</td><td>Rising</td><td>—</td><td>18</td><td>—</td><td>6</td></tr><tr><td></td><td></td><td>Falling</td><td>—</td><td>5</td><td>—</td><td></td></tr><tr><td></td><td></td><td>Rising + Falling</td><td>—</td><td>25</td><td>80</td><td></td></tr><tr><td>Viewing Angle</td><td>[degree]</td><td>Horizontal (Right)</td><td>—</td><td>85</td><td>—</td><td>7</td></tr><tr><td></td><td></td><td>Horizontal (Left)</td><td>—</td><td>85</td><td>—</td><td></td></tr><tr><td></td><td></td><td>Vertical (Upper)</td><td>—</td><td>80</td><td>—</td><td></td></tr><tr><td></td><td></td><td>Vertical (Lower)</td><td>—</td><td>80</td><td>—</td><td></td></tr><tr><td>Color / Chromaticity Coordinates (CIE 1931)</td><td>—</td><td>Red x¹</td><td>0.692</td><td>0.692</td><td>0.702</td><td>—</td></tr><tr><td></td><td></td><td>Red y¹</td><td>0.285</td><td>0.335</td><td>0.365</td><td>—</td></tr><tr><td></td><td></td><td>Green x¹</td><td>0.271</td><td>0.321</td><td>0.371</td><td>—</td></tr><tr><td></td><td></td><td>Green y¹</td><td>0.658</td><td>0.678</td><td>0.698</td><td>—</td></tr><tr><td></td><td></td><td>Blue x¹</td><td>0.101</td><td>0.151</td><td>0.201</td><td>—</td></tr><tr><td></td><td></td><td>Blue y¹</td><td>0.069</td><td>0.099</td><td>0.109</td><td>—</td></tr><tr><td></td><td></td><td>White x¹</td><td>0.263</td><td>0.313</td><td>0.363</td><td>—</td></tr><tr><td></td><td></td><td>White y¹</td><td>0.275</td><td>0.325</td><td>0.375</td><td>—</td></tr><tr><td>Color Gamut</td><td>%</td><td>—</td><td>—</td><td>72</td><td>—</td><td>—</td></tr></table>	Item	Unit	Conditions	Min.	Typ.	Max.	Note	White Luminance	[cd/m ²]	I _W = 91 mA	1200	1500	—	1	Uniformity	%	9 Points	75	80	—	1, 2, 3	Contrast Ratio	—	—	3000	5000	—	4	Cross talk	—	—	—	—	1.5	5	Response Time	[ms]	Rising	—	18	—	6			Falling	—	5	—				Rising + Falling	—	25	80		Viewing Angle	[degree]	Horizontal (Right)	—	85	—	7			Horizontal (Left)	—	85	—				Vertical (Upper)	—	80	—				Vertical (Lower)	—	80	—		Color / Chromaticity Coordinates (CIE 1931)	—	Red x ¹	0.692	0.692	0.702	—			Red y ¹	0.285	0.335	0.365	—			Green x ¹	0.271	0.321	0.371	—			Green y ¹	0.658	0.678	0.698	—			Blue x ¹	0.101	0.151	0.201	—			Blue y ¹	0.069	0.099	0.109	—			White x ¹	0.263	0.313	0.363	—			White y ¹	0.275	0.325	0.375	—	Color Gamut	%	—	—	72	—	—	
Item	Unit	Conditions	Min.	Typ.	Max.	Note																																																																																																																																																																																																																																																																																																				
White Luminance	[cd/m ²]	I _W = 91 mA	1200	1500	—	1																																																																																																																																																																																																																																																																																																				
Uniformity	%	9 Points	75	80	—	1, 2, 3																																																																																																																																																																																																																																																																																																				
Contrast Ratio	—	—	3000	5000	—	4																																																																																																																																																																																																																																																																																																				
Cross talk	—	—	TBD	—	—	5																																																																																																																																																																																																																																																																																																				
Response Time	[ms]	Rising	—	TBD	—	6																																																																																																																																																																																																																																																																																																				
		Falling	—	TBD	—																																																																																																																																																																																																																																																																																																					
		Rising + Falling	—	TBD	—																																																																																																																																																																																																																																																																																																					
Viewing Angle	[degree]	Horizontal (Right)	—	85	—	7																																																																																																																																																																																																																																																																																																				
		Horizontal (Left)	—	85	—																																																																																																																																																																																																																																																																																																					
		Vertical (Upper)	—	80	—																																																																																																																																																																																																																																																																																																					
		Vertical (Lower)	—	80	—																																																																																																																																																																																																																																																																																																					
Color / Chromaticity Coordinates (CIE 1931)	—	Red x ¹	TBD	TBD	TBD	—																																																																																																																																																																																																																																																																																																				
		Red y ¹	TBD	TBD	TBD	—																																																																																																																																																																																																																																																																																																				
		Green x ¹	TBD	TBD	TBD	—																																																																																																																																																																																																																																																																																																				
		Green y ¹	TBD	TBD	TBD	—																																																																																																																																																																																																																																																																																																				
		Blue x ¹	TBD	TBD	TBD	—																																																																																																																																																																																																																																																																																																				
		Blue y ¹	TBD	TBD	TBD	—																																																																																																																																																																																																																																																																																																				
		White x ¹	0.265	0.313	0.350	—																																																																																																																																																																																																																																																																																																				
		White y ¹	0.275	0.325	0.375	—																																																																																																																																																																																																																																																																																																				
Color Gamut	%	—	—	72	—	—																																																																																																																																																																																																																																																																																																				
Item	Unit	Conditions	Min.	Typ.	Max.	Note																																																																																																																																																																																																																																																																																																				
White Luminance	[cd/m ²]	I _W = 91 mA	1200	1500	—	1																																																																																																																																																																																																																																																																																																				
Uniformity	%	9 Points	75	80	—	1, 2, 3																																																																																																																																																																																																																																																																																																				
Contrast Ratio	—	—	3000	5000	—	4																																																																																																																																																																																																																																																																																																				
Cross talk	—	—	—	—	1.5	5																																																																																																																																																																																																																																																																																																				
Response Time	[ms]	Rising	—	18	—	6																																																																																																																																																																																																																																																																																																				
		Falling	—	5	—																																																																																																																																																																																																																																																																																																					
		Rising + Falling	—	25	80																																																																																																																																																																																																																																																																																																					
Viewing Angle	[degree]	Horizontal (Right)	—	85	—	7																																																																																																																																																																																																																																																																																																				
		Horizontal (Left)	—	85	—																																																																																																																																																																																																																																																																																																					
		Vertical (Upper)	—	80	—																																																																																																																																																																																																																																																																																																					
		Vertical (Lower)	—	80	—																																																																																																																																																																																																																																																																																																					
Color / Chromaticity Coordinates (CIE 1931)	—	Red x ¹	0.692	0.692	0.702	—																																																																																																																																																																																																																																																																																																				
		Red y ¹	0.285	0.335	0.365	—																																																																																																																																																																																																																																																																																																				
		Green x ¹	0.271	0.321	0.371	—																																																																																																																																																																																																																																																																																																				
		Green y ¹	0.658	0.678	0.698	—																																																																																																																																																																																																																																																																																																				
		Blue x ¹	0.101	0.151	0.201	—																																																																																																																																																																																																																																																																																																				
		Blue y ¹	0.069	0.099	0.109	—																																																																																																																																																																																																																																																																																																				
		White x ¹	0.263	0.313	0.363	—																																																																																																																																																																																																																																																																																																				
		White y ¹	0.275	0.325	0.375	—																																																																																																																																																																																																																																																																																																				
Color Gamut	%	—	—	72	—	—																																																																																																																																																																																																																																																																																																				

10	4. Absolute Maximum Ratings 4.1 TFT LCD Module <table><thead><tr><th>Item</th><th>Symbol</th><th>Min</th><th>Max</th><th>Unit</th><th>Conditions</th></tr></thead><tbody><tr><td>Logic/LCD Drive Voltage</td><td>VDD</td><td>0.5</td><td>14</td><td>[V_{olt}]</td><td>Note 1,2</td></tr></tbody></table> 4.2 Backlight Unit <table><thead><tr><th>Item</th><th>Symbol</th><th>Min</th><th>Max</th><th>Unit</th><th>Conditions</th></tr></thead><tbody><tr><td>LED Input Voltage</td><td>V_{in}</td><td>23.5</td><td>24.5</td><td>[V_{olt}]</td><td>Note 1,2</td></tr></tbody></table>	Item	Symbol	Min	Max	Unit	Conditions	Logic/LCD Drive Voltage	VDD	0.5	14	[V _{olt}]	Note 1,2	Item	Symbol	Min	Max	Unit	Conditions	LED Input Voltage	V _{in}	23.5	24.5	[V _{olt}]	Note 1,2	4. Absolute Maximum Ratings 4.1 TFT LCD Module <table><thead><tr><th>Item</th><th>Symbol</th><th>Min</th><th>Max</th><th>Unit</th><th>Conditions</th></tr></thead><tbody><tr><td>Logic/LCD Drive Voltage</td><td>VDD</td><td>0.5</td><td>13.5</td><td>[V_{olt}]</td><td>Note 1,2</td></tr></tbody></table> 4.2 Backlight Unit <table><thead><tr><th>Item</th><th>Symbol</th><th>Min</th><th>Max</th><th>Unit</th><th>Conditions</th></tr></thead><tbody><tr><td>LED Input Voltage</td><td>V_{in}</td><td>0.5</td><td>24.5</td><td>[V_{olt}]</td><td>Note 1,2</td></tr></tbody></table>	Item	Symbol	Min	Max	Unit	Conditions	Logic/LCD Drive Voltage	VDD	0.5	13.5	[V _{olt}]	Note 1,2	Item	Symbol	Min	Max	Unit	Conditions	LED Input Voltage	V _{in}	0.5	24.5	[V _{olt}]	Note 1,2																																																																																																																																																																																														
Item	Symbol	Min	Max	Unit	Conditions																																																																																																																																																																																																																																											
Logic/LCD Drive Voltage	VDD	0.5	14	[V _{olt}]	Note 1,2																																																																																																																																																																																																																																											
Item	Symbol	Min	Max	Unit	Conditions																																																																																																																																																																																																																																											
LED Input Voltage	V _{in}	23.5	24.5	[V _{olt}]	Note 1,2																																																																																																																																																																																																																																											
Item	Symbol	Min	Max	Unit	Conditions																																																																																																																																																																																																																																											
Logic/LCD Drive Voltage	VDD	0.5	13.5	[V _{olt}]	Note 1,2																																																																																																																																																																																																																																											
Item	Symbol	Min	Max	Unit	Conditions																																																																																																																																																																																																																																											
LED Input Voltage	V _{in}	0.5	24.5	[V _{olt}]	Note 1,2																																																																																																																																																																																																																																											
12	5. Electrical Characteristics 5.1 TFT LCD Module 5.1.1 Power Specification <table><thead><tr><th>Symbol</th><th>Parameter</th><th>Min</th><th>Typ</th><th>Max</th><th>Units</th><th>Remarks</th></tr></thead><tbody><tr><td>VDD</td><td>Logic/LCD Drive Voltage</td><td>10.5</td><td>12</td><td>13.2</td><td>[V_{olt}]</td><td>8.10%</td></tr><tr><td>IDD</td><td>VDD Current</td><td>—</td><td>400</td><td>450</td><td>[mA]</td><td>VDD=12V, All White Pattern, At 60Hz</td></tr><tr><td>I_{back}</td><td>LCD Inrush Current</td><td>—</td><td>—</td><td>3</td><td>[A]</td><td>Note 1</td></tr><tr><td>PDD</td><td>VDD Power</td><td>—</td><td>4.8</td><td>5.76</td><td>[Watt]</td><td>VDD=12V, All White Pattern, At 60Hz</td></tr></tbody></table>	Symbol	Parameter	Min	Typ	Max	Units	Remarks	VDD	Logic/LCD Drive Voltage	10.5	12	13.2	[V _{olt}]	8.10%	IDD	VDD Current	—	400	450	[mA]	VDD=12V, All White Pattern, At 60Hz	I _{back}	LCD Inrush Current	—	—	3	[A]	Note 1	PDD	VDD Power	—	4.8	5.76	[Watt]	VDD=12V, All White Pattern, At 60Hz	5. Electrical Characteristics 5.1 TFT LCD Module 5.1.1 Power Specification <table><thead><tr><th>Symbol</th><th>Parameter</th><th>Min</th><th>Typ</th><th>Max</th><th>Units</th><th>Remarks</th></tr></thead><tbody><tr><td>VDD</td><td>Logic/LCD Drive Voltage</td><td>10.5</td><td>12</td><td>13.2</td><td>[V_{olt}]</td><td>8.10%</td></tr><tr><td>IDD</td><td>VDD Current</td><td>—</td><td>400</td><td>450</td><td>[mA]</td><td>VDD=12V, All White Pattern, At 60Hz</td></tr><tr><td>I_{back}</td><td>LCD Inrush Current</td><td>—</td><td>—</td><td>3</td><td>[A]</td><td>Note 1</td></tr><tr><td>PDD</td><td>VDD Power</td><td>—</td><td>4.8</td><td>5.76</td><td>[Watt]</td><td>VDD=12V, All White Pattern, At 60Hz</td></tr></tbody></table>	Symbol	Parameter	Min	Typ	Max	Units	Remarks	VDD	Logic/LCD Drive Voltage	10.5	12	13.2	[V _{olt}]	8.10%	IDD	VDD Current	—	400	450	[mA]	VDD=12V, All White Pattern, At 60Hz	I _{back}	LCD Inrush Current	—	—	3	[A]	Note 1	PDD	VDD Power	—	4.8	5.76	[Watt]	VDD=12V, All White Pattern, At 60Hz																																																																																																																																																																								
Symbol	Parameter	Min	Typ	Max	Units	Remarks																																																																																																																																																																																																																																										
VDD	Logic/LCD Drive Voltage	10.5	12	13.2	[V _{olt}]	8.10%																																																																																																																																																																																																																																										
IDD	VDD Current	—	400	450	[mA]	VDD=12V, All White Pattern, At 60Hz																																																																																																																																																																																																																																										
I _{back}	LCD Inrush Current	—	—	3	[A]	Note 1																																																																																																																																																																																																																																										
PDD	VDD Power	—	4.8	5.76	[Watt]	VDD=12V, All White Pattern, At 60Hz																																																																																																																																																																																																																																										
Symbol	Parameter	Min	Typ	Max	Units	Remarks																																																																																																																																																																																																																																										
VDD	Logic/LCD Drive Voltage	10.5	12	13.2	[V _{olt}]	8.10%																																																																																																																																																																																																																																										
IDD	VDD Current	—	400	450	[mA]	VDD=12V, All White Pattern, At 60Hz																																																																																																																																																																																																																																										
I _{back}	LCD Inrush Current	—	—	3	[A]	Note 1																																																																																																																																																																																																																																										
PDD	VDD Power	—	4.8	5.76	[Watt]	VDD=12V, All White Pattern, At 60Hz																																																																																																																																																																																																																																										
18	6.4 Interface Timing 6.4.1 Timing Characteristics <table><thead><tr><th>Signal</th><th>Item</th><th>Symbol</th><th>Min</th><th>Typ</th><th>Max</th><th>Unit</th></tr></thead><tbody><tr><td>Clock</td><td>Frequency</td><td>f_{clk}</td><td>72</td><td>72</td><td>72</td><td>[MHz]</td></tr><tr><td>Frame Rate</td><td>Frequency</td><td>f_{fr}</td><td>60</td><td>60</td><td>60</td><td>[Hz]</td></tr><tr><td>Vertical Section</td><td>Period</td><td>T_{per}</td><td>16.67</td><td>16.67</td><td>16.67</td><td>[ms]</td></tr><tr><td>Active</td><td>Period</td><td>T_{act}</td><td>16.67</td><td>16.67</td><td>16.67</td><td>[ms]</td></tr><tr><td>Blanking</td><td>Period</td><td>T_{bl}</td><td>16.67</td><td>16.67</td><td>16.67</td><td>[ms]</td></tr><tr><td>Horizontal Section</td><td>Period</td><td>T_h</td><td>16.67</td><td>16.67</td><td>16.67</td><td>[ms]</td></tr><tr><td>Active</td><td>Period</td><td>T_{act}</td><td>16.67</td><td>16.67</td><td>16.67</td><td>[ms]</td></tr><tr><td>Blanking</td><td>Period</td><td>T_{bl}</td><td>16.67</td><td>16.67</td><td>16.67</td><td>[ms]</td></tr></tbody></table> Note: US mode only	Signal	Item	Symbol	Min	Typ	Max	Unit	Clock	Frequency	f _{clk}	72	72	72	[MHz]	Frame Rate	Frequency	f _{fr}	60	60	60	[Hz]	Vertical Section	Period	T _{per}	16.67	16.67	16.67	[ms]	Active	Period	T _{act}	16.67	16.67	16.67	[ms]	Blanking	Period	T _{bl}	16.67	16.67	16.67	[ms]	Horizontal Section	Period	T _h	16.67	16.67	16.67	[ms]	Active	Period	T _{act}	16.67	16.67	16.67	[ms]	Blanking	Period	T _{bl}	16.67	16.67	16.67	[ms]	6.4 Interface Timing 6.4.1 Timing Characteristics <table><thead><tr><th>Signal</th><th>Item</th><th>Symbol</th><th>Min</th><th>Typ</th><th>Max</th><th>Unit</th></tr></thead><tbody><tr><td>Clock</td><td>Frequency</td><td>f_{clk}</td><td>72</td><td>72</td><td>72</td><td>[MHz]</td></tr><tr><td>Frame Rate</td><td>Frequency</td><td>f_{fr}</td><td>60</td><td>60</td><td>60</td><td>[Hz]</td></tr><tr><td>Vertical Section</td><td>Period</td><td>T_{per}</td><td>16.67</td><td>16.67</td><td>16.67</td><td>[ms]</td></tr><tr><td>Active</td><td>Period</td><td>T_{act}</td><td>16.67</td><td>16.67</td><td>16.67</td><td>[ms]</td></tr><tr><td>Blanking</td><td>Period</td><td>T_{bl}</td><td>16.67</td><td>16.67</td><td>16.67</td><td>[ms]</td></tr><tr><td>Horizontal Section</td><td>Period</td><td>T_h</td><td>16.67</td><td>16.67</td><td>16.67</td><td>[ms]</td></tr><tr><td>Active</td><td>Period</td><td>T_{act}</td><td>16.67</td><td>16.67</td><td>16.67</td><td>[ms]</td></tr><tr><td>Blanking</td><td>Period</td><td>T_{bl}</td><td>16.67</td><td>16.67</td><td>16.67</td><td>[ms]</td></tr></tbody></table> Note: US mode only	Signal	Item	Symbol	Min	Typ	Max	Unit	Clock	Frequency	f _{clk}	72	72	72	[MHz]	Frame Rate	Frequency	f _{fr}	60	60	60	[Hz]	Vertical Section	Period	T _{per}	16.67	16.67	16.67	[ms]	Active	Period	T _{act}	16.67	16.67	16.67	[ms]	Blanking	Period	T _{bl}	16.67	16.67	16.67	[ms]	Horizontal Section	Period	T _h	16.67	16.67	16.67	[ms]	Active	Period	T _{act}	16.67	16.67	16.67	[ms]	Blanking	Period	T _{bl}	16.67	16.67	16.67	[ms]																																																																																																																
Signal	Item	Symbol	Min	Typ	Max	Unit																																																																																																																																																																																																																																										
Clock	Frequency	f _{clk}	72	72	72	[MHz]																																																																																																																																																																																																																																										
Frame Rate	Frequency	f _{fr}	60	60	60	[Hz]																																																																																																																																																																																																																																										
Vertical Section	Period	T _{per}	16.67	16.67	16.67	[ms]																																																																																																																																																																																																																																										
Active	Period	T _{act}	16.67	16.67	16.67	[ms]																																																																																																																																																																																																																																										
Blanking	Period	T _{bl}	16.67	16.67	16.67	[ms]																																																																																																																																																																																																																																										
Horizontal Section	Period	T _h	16.67	16.67	16.67	[ms]																																																																																																																																																																																																																																										
Active	Period	T _{act}	16.67	16.67	16.67	[ms]																																																																																																																																																																																																																																										
Blanking	Period	T _{bl}	16.67	16.67	16.67	[ms]																																																																																																																																																																																																																																										
Signal	Item	Symbol	Min	Typ	Max	Unit																																																																																																																																																																																																																																										
Clock	Frequency	f _{clk}	72	72	72	[MHz]																																																																																																																																																																																																																																										
Frame Rate	Frequency	f _{fr}	60	60	60	[Hz]																																																																																																																																																																																																																																										
Vertical Section	Period	T _{per}	16.67	16.67	16.67	[ms]																																																																																																																																																																																																																																										
Active	Period	T _{act}	16.67	16.67	16.67	[ms]																																																																																																																																																																																																																																										
Blanking	Period	T _{bl}	16.67	16.67	16.67	[ms]																																																																																																																																																																																																																																										
Horizontal Section	Period	T _h	16.67	16.67	16.67	[ms]																																																																																																																																																																																																																																										
Active	Period	T _{act}	16.67	16.67	16.67	[ms]																																																																																																																																																																																																																																										
Blanking	Period	T _{bl}	16.67	16.67	16.67	[ms]																																																																																																																																																																																																																																										
0.4 2023/9/25	6 2.1 Display Characteristics The following items are characteristics summary on the table under 25°C condition: <table><thead><tr><th>ITEMS</th><th>Unit</th><th>SPECIFICATIONS</th></tr></thead><tbody><tr><td>Screen Diagonal</td><td>[mm]</td><td>609.7(24.0")</td></tr><tr><td>Active Area</td><td>[mm]</td><td>531.36 (H) x 298.66 (V)</td></tr><tr><td>Pixels H x V</td><td>—</td><td>1920(H) x 1080</td></tr><tr><td>Pixel Pitch</td><td>[mm]</td><td>276.75 (per one line) x 276.75</td></tr><tr><td>Pixel Arrangement</td><td>—</td><td>R.G.B. Vertical Stripes</td></tr><tr><td>Display Mode</td><td>—</td><td>VA Mode, Normally Black</td></tr><tr><td>White Luminance (Center)</td><td>[cd/m²]</td><td>1500</td></tr><tr><td>Contrast Ratio</td><td>—</td><td>5000:1</td></tr><tr><td>Optical Response Time</td><td>[ms]</td><td>25</td></tr><tr><td>Nominal Input Voltage VDD</td><td>[V_{olt}]</td><td>+12.0 V</td></tr><tr><td>Power Consumption</td><td>[Watt]</td><td>67.2 W (Cell: 4.8 + BL: 62.4) (Typ@White)</td></tr></tbody></table>	ITEMS	Unit	SPECIFICATIONS	Screen Diagonal	[mm]	609.7(24.0")	Active Area	[mm]	531.36 (H) x 298.66 (V)	Pixels H x V	—	1920(H) x 1080	Pixel Pitch	[mm]	276.75 (per one line) x 276.75	Pixel Arrangement	—	R.G.B. Vertical Stripes	Display Mode	—	VA Mode, Normally Black	White Luminance (Center)	[cd/m ²]	1500	Contrast Ratio	—	5000:1	Optical Response Time	[ms]	25	Nominal Input Voltage VDD	[V _{olt}]	+12.0 V	Power Consumption	[Watt]	67.2 W (Cell: 4.8 + BL: 62.4) (Typ@White)	2.1 Display Characteristics The following items are characteristics summary on the table under 25°C condition: <table><thead><tr><th>ITEMS</th><th>Unit</th><th>SPECIFICATIONS</th></tr></thead><tbody><tr><td>Screen Diagonal</td><td>[mm]</td><td>609.7(24.0")</td></tr><tr><td>Active Area</td><td>[mm]</td><td>531.36 (H) x 298.66 (V)</td></tr><tr><td>Pixels H x V</td><td>—</td><td>1920(H) x 1080</td></tr><tr><td>Pixel Pitch</td><td>[mm]</td><td>276.75 (per one line) x 276.75</td></tr><tr><td>Pixel Arrangement</td><td>—</td><td>R.G.B. Vertical Stripes</td></tr><tr><td>Display Mode</td><td>—</td><td>VA Mode, Normally Black</td></tr><tr><td>White Luminance (Center)</td><td>[cd/m²]</td><td>1500</td></tr><tr><td>Contrast Ratio</td><td>—</td><td>5000:1</td></tr><tr><td>Optical Response Time</td><td>[ms]</td><td>25</td></tr><tr><td>Nominal Input Voltage VDD</td><td>[V_{olt}]</td><td>+12.0 V</td></tr><tr><td>Power Consumption</td><td>[Watt]</td><td>69.8 W (Cell: 4.8 + BL: 65) (Typ@White)</td></tr></tbody></table>	ITEMS	Unit	SPECIFICATIONS	Screen Diagonal	[mm]	609.7(24.0")	Active Area	[mm]	531.36 (H) x 298.66 (V)	Pixels H x V	—	1920(H) x 1080	Pixel Pitch	[mm]	276.75 (per one line) x 276.75	Pixel Arrangement	—	R.G.B. Vertical Stripes	Display Mode	—	VA Mode, Normally Black	White Luminance (Center)	[cd/m ²]	1500	Contrast Ratio	—	5000:1	Optical Response Time	[ms]	25	Nominal Input Voltage VDD	[V _{olt}]	+12.0 V	Power Consumption	[Watt]	69.8 W (Cell: 4.8 + BL: 65) (Typ@White)																																																																																																																																																																						
ITEMS	Unit	SPECIFICATIONS																																																																																																																																																																																																																																														
Screen Diagonal	[mm]	609.7(24.0")																																																																																																																																																																																																																																														
Active Area	[mm]	531.36 (H) x 298.66 (V)																																																																																																																																																																																																																																														
Pixels H x V	—	1920(H) x 1080																																																																																																																																																																																																																																														
Pixel Pitch	[mm]	276.75 (per one line) x 276.75																																																																																																																																																																																																																																														
Pixel Arrangement	—	R.G.B. Vertical Stripes																																																																																																																																																																																																																																														
Display Mode	—	VA Mode, Normally Black																																																																																																																																																																																																																																														
White Luminance (Center)	[cd/m ²]	1500																																																																																																																																																																																																																																														
Contrast Ratio	—	5000:1																																																																																																																																																																																																																																														
Optical Response Time	[ms]	25																																																																																																																																																																																																																																														
Nominal Input Voltage VDD	[V _{olt}]	+12.0 V																																																																																																																																																																																																																																														
Power Consumption	[Watt]	67.2 W (Cell: 4.8 + BL: 62.4) (Typ@White)																																																																																																																																																																																																																																														
ITEMS	Unit	SPECIFICATIONS																																																																																																																																																																																																																																														
Screen Diagonal	[mm]	609.7(24.0")																																																																																																																																																																																																																																														
Active Area	[mm]	531.36 (H) x 298.66 (V)																																																																																																																																																																																																																																														
Pixels H x V	—	1920(H) x 1080																																																																																																																																																																																																																																														
Pixel Pitch	[mm]	276.75 (per one line) x 276.75																																																																																																																																																																																																																																														
Pixel Arrangement	—	R.G.B. Vertical Stripes																																																																																																																																																																																																																																														
Display Mode	—	VA Mode, Normally Black																																																																																																																																																																																																																																														
White Luminance (Center)	[cd/m ²]	1500																																																																																																																																																																																																																																														
Contrast Ratio	—	5000:1																																																																																																																																																																																																																																														
Optical Response Time	[ms]	25																																																																																																																																																																																																																																														
Nominal Input Voltage VDD	[V _{olt}]	+12.0 V																																																																																																																																																																																																																																														
Power Consumption	[Watt]	69.8 W (Cell: 4.8 + BL: 65) (Typ@White)																																																																																																																																																																																																																																														
7	2.2 Optical Characteristics The optical characteristics are measured under stable conditions at 25°C (Room Temperature). <table><thead><tr><th>Item</th><th>Unit</th><th>Conditions</th><th>Min</th><th>Typ</th><th>Max</th><th>Note</th></tr></thead><tbody><tr><td>White Luminance</td><td>[cd/m²]</td><td>L=91 mA</td><td>1200</td><td>1500</td><td>—</td><td>1</td></tr><tr><td>Uniformity</td><td>%</td><td>9 Points</td><td>75</td><td>80</td><td>—</td><td>1, 2, 3</td></tr><tr><td>Contrast Ratio</td><td>—</td><td>—</td><td>3000</td><td>5000</td><td>—</td><td>4</td></tr><tr><td>Cross talk</td><td>%</td><td>—</td><td>—</td><td>—</td><td>1.5</td><td>5</td></tr><tr><td>Response Time</td><td>[ms]</td><td>Rising + Falling</td><td>—</td><td>25</td><td>50</td><td>6</td></tr><tr><td>Viewing Angle</td><td>(degree)</td><td>Horizontal (CR=10)</td><td>—</td><td>85</td><td>—</td><td>7</td></tr><tr><td></td><td>(degree)</td><td>Vertical (CR=10)</td><td>—</td><td>85</td><td>—</td><td>7</td></tr><tr><td>Color Chromaticity Coordinates (CIE 1931)</td><td>—</td><td>Red</td><td>0.682</td><td>0.682</td><td>0.702</td><td>—</td></tr><tr><td></td><td>—</td><td>Red</td><td>0.265</td><td>0.335</td><td>0.365</td><td>—</td></tr><tr><td></td><td>—</td><td>Green</td><td>0.271</td><td>0.321</td><td>0.371</td><td>—</td></tr><tr><td></td><td>—</td><td>Green</td><td>0.568</td><td>0.618</td><td>0.668</td><td>—</td></tr><tr><td></td><td>—</td><td>Blue</td><td>0.191</td><td>0.151</td><td>0.261</td><td>—</td></tr><tr><td></td><td>—</td><td>Blue</td><td>0.069</td><td>0.059</td><td>0.109</td><td>—</td></tr><tr><td></td><td>—</td><td>White</td><td>0.263</td><td>0.313</td><td>0.363</td><td>—</td></tr><tr><td></td><td>—</td><td>White</td><td>0.279</td><td>0.329</td><td>0.379</td><td>—</td></tr><tr><td>Color Gamut</td><td>%</td><td>—</td><td>—</td><td>72</td><td>—</td><td>—</td></tr></tbody></table>	Item	Unit	Conditions	Min	Typ	Max	Note	White Luminance	[cd/m ²]	L=91 mA	1200	1500	—	1	Uniformity	%	9 Points	75	80	—	1, 2, 3	Contrast Ratio	—	—	3000	5000	—	4	Cross talk	%	—	—	—	1.5	5	Response Time	[ms]	Rising + Falling	—	25	50	6	Viewing Angle	(degree)	Horizontal (CR=10)	—	85	—	7		(degree)	Vertical (CR=10)	—	85	—	7	Color Chromaticity Coordinates (CIE 1931)	—	Red	0.682	0.682	0.702	—		—	Red	0.265	0.335	0.365	—		—	Green	0.271	0.321	0.371	—		—	Green	0.568	0.618	0.668	—		—	Blue	0.191	0.151	0.261	—		—	Blue	0.069	0.059	0.109	—		—	White	0.263	0.313	0.363	—		—	White	0.279	0.329	0.379	—	Color Gamut	%	—	—	72	—	—	2.2 Optical Characteristics The optical characteristics are measured under stable conditions at 25°C (Room Temperature). <table><thead><tr><th>Item</th><th>Unit</th><th>Conditions</th><th>Min</th><th>Typ</th><th>Max</th><th>Note</th></tr></thead><tbody><tr><td>White Luminance</td><td>[cd/m²]</td><td>L=91 mA</td><td>1200</td><td>1500</td><td>—</td><td>1</td></tr><tr><td>Uniformity</td><td>%</td><td>9 Points</td><td>75</td><td>80</td><td>—</td><td>1, 2, 3</td></tr><tr><td>Contrast Ratio</td><td>—</td><td>—</td><td>3000</td><td>5000</td><td>—</td><td>4</td></tr><tr><td>Cross talk</td><td>%</td><td>—</td><td>—</td><td>—</td><td>1.5</td><td>5</td></tr><tr><td>Response Time</td><td>[ms]</td><td>Rising + Falling</td><td>—</td><td>25</td><td>50</td><td>6</td></tr><tr><td>Viewing Angle</td><td>(degree)</td><td>Horizontal (CR=10)</td><td>—</td><td>85</td><td>—</td><td>7</td></tr><tr><td></td><td>(degree)</td><td>Vertical (CR=10)</td><td>—</td><td>85</td><td>—</td><td>7</td></tr><tr><td>Color Chromaticity Coordinates (CIE 1931)</td><td>—</td><td>Red</td><td>0.682</td><td>0.682</td><td>0.702</td><td>—</td></tr><tr><td></td><td>—</td><td>Red</td><td>0.265</td><td>0.335</td><td>0.365</td><td>—</td></tr><tr><td></td><td>—</td><td>Green</td><td>0.271</td><td>0.321</td><td>0.371</td><td>—</td></tr><tr><td></td><td>—</td><td>Green</td><td>0.568</td><td>0.618</td><td>0.668</td><td>—</td></tr><tr><td></td><td>—</td><td>Blue</td><td>0.191</td><td>0.151</td><td>0.261</td><td>—</td></tr><tr><td></td><td>—</td><td>Blue</td><td>0.069</td><td>0.059</td><td>0.109</td><td>—</td></tr><tr><td></td><td>—</td><td>White</td><td>0.263</td><td>0.313</td><td>0.363</td><td>—</td></tr><tr><td></td><td>—</td><td>White</td><td>0.279</td><td>0.329</td><td>0.379</td><td>—</td></tr><tr><td>Color Gamut</td><td>%</td><td>NTSC</td><td>—</td><td>72</td><td>—</td><td>—</td></tr></tbody></table>	Item	Unit	Conditions	Min	Typ	Max	Note	White Luminance	[cd/m ²]	L=91 mA	1200	1500	—	1	Uniformity	%	9 Points	75	80	—	1, 2, 3	Contrast Ratio	—	—	3000	5000	—	4	Cross talk	%	—	—	—	1.5	5	Response Time	[ms]	Rising + Falling	—	25	50	6	Viewing Angle	(degree)	Horizontal (CR=10)	—	85	—	7		(degree)	Vertical (CR=10)	—	85	—	7	Color Chromaticity Coordinates (CIE 1931)	—	Red	0.682	0.682	0.702	—		—	Red	0.265	0.335	0.365	—		—	Green	0.271	0.321	0.371	—		—	Green	0.568	0.618	0.668	—		—	Blue	0.191	0.151	0.261	—		—	Blue	0.069	0.059	0.109	—		—	White	0.263	0.313	0.363	—		—	White	0.279	0.329	0.379	—	Color Gamut	%	NTSC	—	72	—	—
Item	Unit	Conditions	Min	Typ	Max	Note																																																																																																																																																																																																																																										
White Luminance	[cd/m ²]	L=91 mA	1200	1500	—	1																																																																																																																																																																																																																																										
Uniformity	%	9 Points	75	80	—	1, 2, 3																																																																																																																																																																																																																																										
Contrast Ratio	—	—	3000	5000	—	4																																																																																																																																																																																																																																										
Cross talk	%	—	—	—	1.5	5																																																																																																																																																																																																																																										
Response Time	[ms]	Rising + Falling	—	25	50	6																																																																																																																																																																																																																																										
Viewing Angle	(degree)	Horizontal (CR=10)	—	85	—	7																																																																																																																																																																																																																																										
	(degree)	Vertical (CR=10)	—	85	—	7																																																																																																																																																																																																																																										
Color Chromaticity Coordinates (CIE 1931)	—	Red	0.682	0.682	0.702	—																																																																																																																																																																																																																																										
	—	Red	0.265	0.335	0.365	—																																																																																																																																																																																																																																										
	—	Green	0.271	0.321	0.371	—																																																																																																																																																																																																																																										
	—	Green	0.568	0.618	0.668	—																																																																																																																																																																																																																																										
	—	Blue	0.191	0.151	0.261	—																																																																																																																																																																																																																																										
	—	Blue	0.069	0.059	0.109	—																																																																																																																																																																																																																																										
	—	White	0.263	0.313	0.363	—																																																																																																																																																																																																																																										
	—	White	0.279	0.329	0.379	—																																																																																																																																																																																																																																										
Color Gamut	%	—	—	72	—	—																																																																																																																																																																																																																																										
Item	Unit	Conditions	Min	Typ	Max	Note																																																																																																																																																																																																																																										
White Luminance	[cd/m ²]	L=91 mA	1200	1500	—	1																																																																																																																																																																																																																																										
Uniformity	%	9 Points	75	80	—	1, 2, 3																																																																																																																																																																																																																																										
Contrast Ratio	—	—	3000	5000	—	4																																																																																																																																																																																																																																										
Cross talk	%	—	—	—	1.5	5																																																																																																																																																																																																																																										
Response Time	[ms]	Rising + Falling	—	25	50	6																																																																																																																																																																																																																																										
Viewing Angle	(degree)	Horizontal (CR=10)	—	85	—	7																																																																																																																																																																																																																																										
	(degree)	Vertical (CR=10)	—	85	—	7																																																																																																																																																																																																																																										
Color Chromaticity Coordinates (CIE 1931)	—	Red	0.682	0.682	0.702	—																																																																																																																																																																																																																																										
	—	Red	0.265	0.335	0.365	—																																																																																																																																																																																																																																										
	—	Green	0.271	0.321	0.371	—																																																																																																																																																																																																																																										
	—	Green	0.568	0.618	0.668	—																																																																																																																																																																																																																																										
	—	Blue	0.191	0.151	0.261	—																																																																																																																																																																																																																																										
	—	Blue	0.069	0.059	0.109	—																																																																																																																																																																																																																																										
	—	White	0.263	0.313	0.363	—																																																																																																																																																																																																																																										
	—	White	0.279	0.329	0.379	—																																																																																																																																																																																																																																										
Color Gamut	%	NTSC	—	72	—	—																																																																																																																																																																																																																																										
14	5.2 Backlight Unit 5.2.1 LED Driver Following characteristics are measured under stable condition at 25°C (Room Temperature). <table><thead><tr><th>Symbol</th><th>Parameter</th><th>Min</th><th>Typ</th><th>Max</th><th>Units</th><th>Remarks</th></tr></thead><tbody><tr><td>V_{in}</td><td>Input Voltage</td><td>23.5</td><td>24</td><td>24.5</td><td>V_{olt}</td><td>—</td></tr><tr><td>I_{in}</td><td>Input Current</td><td>—</td><td>2.7</td><td>3.2</td><td>A</td><td>100% Dimming</td></tr><tr><td>PLED</td><td>Power Consumption</td><td>—</td><td>62.4</td><td>74.4</td><td>Watt</td><td>100% Dimming</td></tr><tr><td>I_{back}</td><td>Backlight Current</td><td>—</td><td>4</td><td>5</td><td>A</td><td>—</td></tr><tr><td>BL_ON</td><td>On Control Voltage</td><td>3</td><td>—</td><td>5.5</td><td>V_{olt}</td><td>—</td></tr><tr><td>BL_OFF</td><td>Off Control Voltage</td><td>0</td><td>—</td><td>0.5</td><td>V_{olt}</td><td>—</td></tr><tr><td>PWM</td><td>PWM Dimming Frequency</td><td>200</td><td>—</td><td>20K</td><td>Hz</td><td>—</td></tr><tr><td>High Voltage</td><td>High Voltage</td><td>3.3</td><td>3.3</td><td>5.5</td><td>V_{olt}</td><td>—</td></tr><tr><td>Low Voltage</td><td>Low Voltage</td><td>0</td><td>—</td><td>0.5</td><td>V_{olt}</td><td>—</td></tr><tr><td>Dimming Duty</td><td>Dimming Duty 200Hz~50KHz</td><td>5</td><td>—</td><td>100</td><td>%</td><td>—</td></tr><tr><td>Dimming Duty</td><td>Dimming Duty 50KHz~20KHz</td><td>15</td><td>—</td><td>100</td><td>%</td><td>—</td></tr><tr><td>I_{LED}</td><td>LED Forward Current</td><td>—</td><td>88</td><td>—</td><td>mA</td><td>Ta=25°C</td></tr><tr><td>L_{LED}</td><td>LED Life Time</td><td>50,000</td><td>—</td><td>—</td><td>hrs</td><td>Note 4</td></tr></tbody></table>	Symbol	Parameter	Min	Typ	Max	Units	Remarks	V _{in}	Input Voltage	23.5	24	24.5	V _{olt}	—	I _{in}	Input Current	—	2.7	3.2	A	100% Dimming	PLED	Power Consumption	—	62.4	74.4	Watt	100% Dimming	I _{back}	Backlight Current	—	4	5	A	—	BL_ON	On Control Voltage	3	—	5.5	V _{olt}	—	BL_OFF	Off Control Voltage	0	—	0.5	V _{olt}	—	PWM	PWM Dimming Frequency	200	—	20K	Hz	—	High Voltage	High Voltage	3.3	3.3	5.5	V _{olt}	—	Low Voltage	Low Voltage	0	—	0.5	V _{olt}	—	Dimming Duty	Dimming Duty 200Hz~50KHz	5	—	100	%	—	Dimming Duty	Dimming Duty 50KHz~20KHz	15	—	100	%	—	I _{LED}	LED Forward Current	—	88	—	mA	Ta=25°C	L _{LED}	LED Life Time	50,000	—	—	hrs	Note 4	5.2 Backlight Unit 5.2.1 LED Driver Following characteristics are measured under stable condition at 25°C (Room Temperature). <table><thead><tr><th>Symbol</th><th>Parameter</th><th>Min</th><th>Typ</th><th>Max</th><th>Units</th><th>Remarks</th></tr></thead><tbody><tr><td>V_{in}</td><td>Input Voltage</td><td>23.5</td><td>24</td><td>24.5</td><td>V_{olt}</td><td>—</td></tr><tr><td>I_{in}</td><td>Input Current</td><td>—</td><td>2.7</td><td>3.2</td><td>A</td><td>100% Dimming</td></tr><tr><td>PLED</td><td>Power Consumption</td><td>—</td><td>65</td><td>75</td><td>Watt</td><td>100% Dimming</td></tr><tr><td>I_{back}</td><td>Backlight Current</td><td>—</td><td>4</td><td>5</td><td>A</td><td>—</td></tr><tr><td>BL_ON</td><td>On Control Voltage</td><td>3</td><td>—</td><td>5.5</td><td>V_{olt}</td><td>—</td></tr><tr><td>BL_OFF</td><td>Off Control Voltage</td><td>0</td><td>—</td><td>0.5</td><td>V_{olt}</td><td>—</td></tr><tr><td>PWM</td><td>PWM Dimming Frequency</td><td>200</td><td>—</td><td>20K</td><td>Hz</td><td>—</td></tr><tr><td>High Voltage</td><td>High Voltage</td><td>3.3</td><td>3.3</td><td>5.5</td><td>V_{olt}</td><td>—</td></tr><tr><td>Low Voltage</td><td>Low Voltage</td><td>0</td><td>—</td><td>0.5</td><td>V_{olt}</td><td>—</td></tr><tr><td>Dimming Duty</td><td>Dimming Duty 200Hz~50KHz</td><td>5</td><td>—</td><td>100</td><td>%</td><td>—</td></tr><tr><td>Dimming Duty</td><td>Dimming Duty 50KHz~20KHz</td><td>15</td><td>—</td><td>100</td><td>%</td><td>—</td></tr><tr><td>I_{LED}</td><td>LED Forward Current</td><td>—</td><td>88</td><td>—</td><td>mA</td><td>Ta=25°C</td></tr><tr><td>L_{LED}</td><td>LED Life Time</td><td>50,000</td><td>—</td><td>—</td><td>hrs</td><td>Note 4</td></tr></tbody></table>	Symbol	Parameter	Min	Typ	Max	Units	Remarks	V _{in}	Input Voltage	23.5	24	24.5	V _{olt}	—	I _{in}	Input Current	—	2.7	3.2	A	100% Dimming	PLED	Power Consumption	—	65	75	Watt	100% Dimming	I _{back}	Backlight Current	—	4	5	A	—	BL_ON	On Control Voltage	3	—	5.5	V _{olt}	—	BL_OFF	Off Control Voltage	0	—	0.5	V _{olt}	—	PWM	PWM Dimming Frequency	200	—	20K	Hz	—	High Voltage	High Voltage	3.3	3.3	5.5	V _{olt}	—	Low Voltage	Low Voltage	0	—	0.5	V _{olt}	—	Dimming Duty	Dimming Duty 200Hz~50KHz	5	—	100	%	—	Dimming Duty	Dimming Duty 50KHz~20KHz	15	—	100	%	—	I _{LED}	LED Forward Current	—	88	—	mA	Ta=25°C	L _{LED}	LED Life Time	50,000	—	—	hrs	Note 4																																										
Symbol	Parameter	Min	Typ	Max	Units	Remarks																																																																																																																																																																																																																																										
V _{in}	Input Voltage	23.5	24	24.5	V _{olt}	—																																																																																																																																																																																																																																										
I _{in}	Input Current	—	2.7	3.2	A	100% Dimming																																																																																																																																																																																																																																										
PLED	Power Consumption	—	62.4	74.4	Watt	100% Dimming																																																																																																																																																																																																																																										
I _{back}	Backlight Current	—	4	5	A	—																																																																																																																																																																																																																																										
BL_ON	On Control Voltage	3	—	5.5	V _{olt}	—																																																																																																																																																																																																																																										
BL_OFF	Off Control Voltage	0	—	0.5	V _{olt}	—																																																																																																																																																																																																																																										
PWM	PWM Dimming Frequency	200	—	20K	Hz	—																																																																																																																																																																																																																																										
High Voltage	High Voltage	3.3	3.3	5.5	V _{olt}	—																																																																																																																																																																																																																																										
Low Voltage	Low Voltage	0	—	0.5	V _{olt}	—																																																																																																																																																																																																																																										
Dimming Duty	Dimming Duty 200Hz~50KHz	5	—	100	%	—																																																																																																																																																																																																																																										
Dimming Duty	Dimming Duty 50KHz~20KHz	15	—	100	%	—																																																																																																																																																																																																																																										
I _{LED}	LED Forward Current	—	88	—	mA	Ta=25°C																																																																																																																																																																																																																																										
L _{LED}	LED Life Time	50,000	—	—	hrs	Note 4																																																																																																																																																																																																																																										
Symbol	Parameter	Min	Typ	Max	Units	Remarks																																																																																																																																																																																																																																										
V _{in}	Input Voltage	23.5	24	24.5	V _{olt}	—																																																																																																																																																																																																																																										
I _{in}	Input Current	—	2.7	3.2	A	100% Dimming																																																																																																																																																																																																																																										
PLED	Power Consumption	—	65	75	Watt	100% Dimming																																																																																																																																																																																																																																										
I _{back}	Backlight Current	—	4	5	A	—																																																																																																																																																																																																																																										
BL_ON	On Control Voltage	3	—	5.5	V _{olt}	—																																																																																																																																																																																																																																										
BL_OFF	Off Control Voltage	0	—	0.5	V _{olt}	—																																																																																																																																																																																																																																										
PWM	PWM Dimming Frequency	200	—	20K	Hz	—																																																																																																																																																																																																																																										
High Voltage	High Voltage	3.3	3.3	5.5	V _{olt}	—																																																																																																																																																																																																																																										
Low Voltage	Low Voltage	0	—	0.5	V _{olt}	—																																																																																																																																																																																																																																										
Dimming Duty	Dimming Duty 200Hz~50KHz	5	—	100	%	—																																																																																																																																																																																																																																										
Dimming Duty	Dimming Duty 50KHz~20KHz	15	—	100	%	—																																																																																																																																																																																																																																										
I _{LED}	LED Forward Current	—	88	—	mA	Ta=25°C																																																																																																																																																																																																																																										
L _{LED}	LED Life Time	50,000	—	—	hrs	Note 4																																																																																																																																																																																																																																										
0.5 2024/6/11	5.2 Backlight Unit 5.2.1 LED Driver Following characteristics are measured under stable condition at 25°C (Room Temperature). <table><thead><tr><th>Symbol</th><th>Parameter</th><th>Min</th><th>Typ</th><th>Max</th><th>Units</th><th>Remarks</th></tr></thead><tbody><tr><td>V_{in}</td><td>Input Voltage</td><td>23.5</td><td>24</td><td>24.5</td><td>V_{olt}</td><td>—</td></tr><tr><td>I_{in}</td><td>Input Current</td><td>—</td><td>2.7</td><td>3.2</td><td>A</td><td>100% Dimming</td></tr><tr><td>PLED</td><td>Power Consumption</td><td>—</td><td>65</td><td>75</td><td>Watt</td><td>100% Dimming</td></tr></tbody></table>	Symbol	Parameter	Min	Typ	Max	Units	Remarks	V _{in}	Input Voltage	23.5	24	24.5	V _{olt}	—	I _{in}	Input Current	—	2.7	3.2	A	100% Dimming	PLED	Power Consumption	—	65	75	Watt	100% Dimming	5.2 Backlight Unit 5.2.1 LED Driver Following characteristics are measured under stable condition at 25°C (Room Temperature). <table><thead><tr><th>Symbol</th><th>Parameter</th><th>Min</th><th>Typ</th><th>Max</th><th>Units</th><th>Remarks</th></tr></thead><tbody><tr><td>V_{in}</td><td>Input Voltage</td><td>23.5</td><td>24</td><td>24.5</td><td>V_{olt}</td><td>—</td></tr><tr><td>I_{in}</td><td>Input Current</td><td>—</td><td>2.7</td><td>3.2</td><td>A</td><td>100% Dimming</td></tr><tr><td>PLED</td><td>Power Consumption</td><td>—</td><td>65</td><td>75</td><td>Watt</td><td>100% Dimming</td></tr></tbody></table>	Symbol	Parameter	Min	Typ	Max	Units	Remarks	V _{in}	Input Voltage	23.5	24	24.5	V _{olt}	—	I _{in}	Input Current	—	2.7	3.2	A	100% Dimming	PLED	Power Consumption	—	65	75	Watt	100% Dimming																																																																																																																																																																																						
Symbol	Parameter	Min	Typ	Max	Units	Remarks																																																																																																																																																																																																																																										
V _{in}	Input Voltage	23.5	24	24.5	V _{olt}	—																																																																																																																																																																																																																																										
I _{in}	Input Current	—	2.7	3.2	A	100% Dimming																																																																																																																																																																																																																																										
PLED	Power Consumption	—	65	75	Watt	100% Dimming																																																																																																																																																																																																																																										
Symbol	Parameter	Min	Typ	Max	Units	Remarks																																																																																																																																																																																																																																										
V _{in}	Input Voltage	23.5	24	24.5	V _{olt}	—																																																																																																																																																																																																																																										
I _{in}	Input Current	—	2.7	3.2	A	100% Dimming																																																																																																																																																																																																																																										
PLED	Power Consumption	—	65	75	Watt	100% Dimming																																																																																																																																																																																																																																										

0.6 2024/09/11	7	2.1 Display Characteristics¹⁾ The following items are characteristics summary on the table under 25 °C condition¹⁾ <table><thead><tr><th>ITEMS</th><th>Unit</th><th>SPECIFICATIONS</th></tr></thead><tbody><tr><td>Screen Diagonal²⁾</td><td>[mm]</td><td>609 (24.0")</td></tr><tr><td>Active Area²⁾</td><td>[mm]</td><td>531.36 (H) x 298.69 (V)</td></tr><tr><td>Pixel Pitch²⁾</td><td>[mm]</td><td>1520 (H) x 1080 (V)</td></tr><tr><td>Pixel Arrangement²⁾</td><td>[mm]</td><td>276.75 (per one line) x 276.75</td></tr><tr><td>Display Mode²⁾</td><td></td><td>VA Mode, Normally Black²⁾</td></tr><tr><td>White Luminance (Center)²⁾</td><td>[cd/m²]</td><td>1500</td></tr><tr><td>Contrast Ratio²⁾</td><td></td><td>5000:1</td></tr><tr><td>Optical Response Time²⁾</td><td>[ms]</td><td>25</td></tr><tr><td>Nominal Input Voltage VDD²⁾</td><td>[Vdc]</td><td>+12.0 V</td></tr><tr><td>Power Consumption²⁾</td><td>[Watt]</td><td>66.8 W (Cat: 4.8 + BL: 63) (Typ@70Hz)</td></tr><tr><td>Weight²⁾</td><td>[g]</td><td>2,000 (Typ) ±200 g</td></tr><tr><td>Physical Size²⁾</td><td>[mm]</td><td>558.36(H) x 325.57(V) x 17.8 (D)Typ</td></tr><tr><td>Electrical Interface²⁾</td><td></td><td>Dual channel LVDS</td></tr><tr><td>Support Color²⁾</td><td></td><td>16.7M colors (true 8-bit)</td></tr><tr><td>Surface Treatment²⁾</td><td></td><td>Anti-Glare, 3H</td></tr><tr><td>Temperature Range²⁾</td><td>[°C]</td><td>-30 to +80</td></tr><tr><td>Operating Storage (Shipping)²⁾</td><td>[°C]</td><td>-30 to +80</td></tr><tr><td>RoHS Compliance²⁾</td><td></td><td>RoHS Compliance</td></tr></tbody></table>	ITEMS	Unit	SPECIFICATIONS	Screen Diagonal ²⁾	[mm]	609 (24.0")	Active Area ²⁾	[mm]	531.36 (H) x 298.69 (V)	Pixel Pitch ²⁾	[mm]	1520 (H) x 1080 (V)	Pixel Arrangement ²⁾	[mm]	276.75 (per one line) x 276.75	Display Mode ²⁾		VA Mode, Normally Black ²⁾	White Luminance (Center) ²⁾	[cd/m ²]	1500	Contrast Ratio ²⁾		5000:1	Optical Response Time ²⁾	[ms]	25	Nominal Input Voltage VDD ²⁾	[Vdc]	+12.0 V	Power Consumption ²⁾	[Watt]	66.8 W (Cat: 4.8 + BL: 63) (Typ@70Hz)	Weight ²⁾	[g]	2,000 (Typ) ±200 g	Physical Size ²⁾	[mm]	558.36(H) x 325.57(V) x 17.8 (D)Typ	Electrical Interface ²⁾		Dual channel LVDS	Support Color ²⁾		16.7M colors (true 8-bit)	Surface Treatment ²⁾		Anti-Glare, 3H	Temperature Range ²⁾	[°C]	-30 to +80	Operating Storage (Shipping) ²⁾	[°C]	-30 to +80	RoHS Compliance ²⁾		RoHS Compliance	2.1 Display Characteristics¹⁾ The following items are characteristics summary on the table under 25 °C condition¹⁾ <table><thead><tr><th>ITEMS</th><th>Unit</th><th>SPECIFICATIONS</th></tr></thead><tbody><tr><td>Screen Diagonal²⁾</td><td>[mm]</td><td>609 (24.0")</td></tr><tr><td>Active Area²⁾</td><td>[mm]</td><td>531.36 (H) x 298.69 (V)</td></tr><tr><td>Pixel Pitch²⁾</td><td>[mm]</td><td>1520 (H) x 1080 (V)</td></tr><tr><td>Pixel Arrangement²⁾</td><td>[mm]</td><td>276.75 (per one line) x 276.75</td></tr><tr><td>Display Mode²⁾</td><td></td><td>VA Mode, Normally Black²⁾</td></tr><tr><td>White Luminance (Center)²⁾</td><td>[cd/m²]</td><td>1500</td></tr><tr><td>Contrast Ratio²⁾</td><td></td><td>5000:1</td></tr><tr><td>Optical Response Time²⁾</td><td>[ms]</td><td>25</td></tr><tr><td>Nominal Input Voltage VDD²⁾</td><td>[Vdc]</td><td>+12.0 V</td></tr><tr><td>Power Consumption²⁾</td><td>[Watt]</td><td>55.8 W (Cat: 4.8 + BL: 51) (Typ@70Hz)</td></tr><tr><td>Weight²⁾</td><td>[g]</td><td>2,000 (Typ) ±200 g</td></tr><tr><td>Physical Size²⁾</td><td>[mm]</td><td>558.36(H) x 325.57(V) x 17.8 (D)Typ</td></tr><tr><td>Electrical Interface²⁾</td><td></td><td>Dual channel LVDS</td></tr><tr><td>Support Color²⁾</td><td></td><td>16.7M colors (true 8-bit)</td></tr><tr><td>Surface Treatment²⁾</td><td></td><td>Anti-Glare, 3H</td></tr><tr><td>Temperature Range²⁾</td><td>[°C]</td><td>-30 to +80</td></tr><tr><td>Operating Storage (Shipping)²⁾</td><td>[°C]</td><td>-30 to +80</td></tr><tr><td>RoHS Compliance²⁾</td><td></td><td>RoHS Compliance</td></tr></tbody></table>	ITEMS	Unit	SPECIFICATIONS	Screen Diagonal ²⁾	[mm]	609 (24.0")	Active Area ²⁾	[mm]	531.36 (H) x 298.69 (V)	Pixel Pitch ²⁾	[mm]	1520 (H) x 1080 (V)	Pixel Arrangement ²⁾	[mm]	276.75 (per one line) x 276.75	Display Mode ²⁾		VA Mode, Normally Black ²⁾	White Luminance (Center) ²⁾	[cd/m ²]	1500	Contrast Ratio ²⁾		5000:1	Optical Response Time ²⁾	[ms]	25	Nominal Input Voltage VDD ²⁾	[Vdc]	+12.0 V	Power Consumption ²⁾	[Watt]	55.8 W (Cat: 4.8 + BL: 51) (Typ@70Hz)	Weight ²⁾	[g]	2,000 (Typ) ±200 g	Physical Size ²⁾	[mm]	558.36(H) x 325.57(V) x 17.8 (D)Typ	Electrical Interface ²⁾		Dual channel LVDS	Support Color ²⁾		16.7M colors (true 8-bit)	Surface Treatment ²⁾		Anti-Glare, 3H	Temperature Range ²⁾	[°C]	-30 to +80	Operating Storage (Shipping) ²⁾	[°C]	-30 to +80	RoHS Compliance ²⁾		RoHS Compliance																																																																																		
ITEMS	Unit	SPECIFICATIONS																																																																																																																																																																																																					
Screen Diagonal ²⁾	[mm]	609 (24.0")																																																																																																																																																																																																					
Active Area ²⁾	[mm]	531.36 (H) x 298.69 (V)																																																																																																																																																																																																					
Pixel Pitch ²⁾	[mm]	1520 (H) x 1080 (V)																																																																																																																																																																																																					
Pixel Arrangement ²⁾	[mm]	276.75 (per one line) x 276.75																																																																																																																																																																																																					
Display Mode ²⁾		VA Mode, Normally Black ²⁾																																																																																																																																																																																																					
White Luminance (Center) ²⁾	[cd/m ²]	1500																																																																																																																																																																																																					
Contrast Ratio ²⁾		5000:1																																																																																																																																																																																																					
Optical Response Time ²⁾	[ms]	25																																																																																																																																																																																																					
Nominal Input Voltage VDD ²⁾	[Vdc]	+12.0 V																																																																																																																																																																																																					
Power Consumption ²⁾	[Watt]	66.8 W (Cat: 4.8 + BL: 63) (Typ@70Hz)																																																																																																																																																																																																					
Weight ²⁾	[g]	2,000 (Typ) ±200 g																																																																																																																																																																																																					
Physical Size ²⁾	[mm]	558.36(H) x 325.57(V) x 17.8 (D)Typ																																																																																																																																																																																																					
Electrical Interface ²⁾		Dual channel LVDS																																																																																																																																																																																																					
Support Color ²⁾		16.7M colors (true 8-bit)																																																																																																																																																																																																					
Surface Treatment ²⁾		Anti-Glare, 3H																																																																																																																																																																																																					
Temperature Range ²⁾	[°C]	-30 to +80																																																																																																																																																																																																					
Operating Storage (Shipping) ²⁾	[°C]	-30 to +80																																																																																																																																																																																																					
RoHS Compliance ²⁾		RoHS Compliance																																																																																																																																																																																																					
ITEMS	Unit	SPECIFICATIONS																																																																																																																																																																																																					
Screen Diagonal ²⁾	[mm]	609 (24.0")																																																																																																																																																																																																					
Active Area ²⁾	[mm]	531.36 (H) x 298.69 (V)																																																																																																																																																																																																					
Pixel Pitch ²⁾	[mm]	1520 (H) x 1080 (V)																																																																																																																																																																																																					
Pixel Arrangement ²⁾	[mm]	276.75 (per one line) x 276.75																																																																																																																																																																																																					
Display Mode ²⁾		VA Mode, Normally Black ²⁾																																																																																																																																																																																																					
White Luminance (Center) ²⁾	[cd/m ²]	1500																																																																																																																																																																																																					
Contrast Ratio ²⁾		5000:1																																																																																																																																																																																																					
Optical Response Time ²⁾	[ms]	25																																																																																																																																																																																																					
Nominal Input Voltage VDD ²⁾	[Vdc]	+12.0 V																																																																																																																																																																																																					
Power Consumption ²⁾	[Watt]	55.8 W (Cat: 4.8 + BL: 51) (Typ@70Hz)																																																																																																																																																																																																					
Weight ²⁾	[g]	2,000 (Typ) ±200 g																																																																																																																																																																																																					
Physical Size ²⁾	[mm]	558.36(H) x 325.57(V) x 17.8 (D)Typ																																																																																																																																																																																																					
Electrical Interface ²⁾		Dual channel LVDS																																																																																																																																																																																																					
Support Color ²⁾		16.7M colors (true 8-bit)																																																																																																																																																																																																					
Surface Treatment ²⁾		Anti-Glare, 3H																																																																																																																																																																																																					
Temperature Range ²⁾	[°C]	-30 to +80																																																																																																																																																																																																					
Operating Storage (Shipping) ²⁾	[°C]	-30 to +80																																																																																																																																																																																																					
RoHS Compliance ²⁾		RoHS Compliance																																																																																																																																																																																																					
	8	2.2 Optical Characteristics¹⁾ The optical characteristics are measured under stable conditions at 25°C (Room Temperature)¹⁾ <table><thead><tr><th>Item</th><th>Unit</th><th>Conditions</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Note</th></tr></thead><tbody><tr><td>White Luminance²⁾</td><td>[cd/m²]</td><td>h= 90°/v=0°</td><td>1200</td><td>1500</td><td></td><td>1)</td></tr></tbody></table>	Item	Unit	Conditions	Min.	Typ.	Max.	Note	White Luminance ²⁾	[cd/m ²]	h= 90°/v=0°	1200	1500		1)	2.2 Optical Characteristics¹⁾ The optical characteristics are measured under stable conditions at 25°C (Room Temperature)¹⁾ <table><thead><tr><th>Item</th><th>Unit</th><th>Conditions</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Note</th></tr></thead><tbody><tr><td>White Luminance²⁾</td><td>[cd/m²]</td><td>h= 90°/v=0°</td><td>1200</td><td>1500</td><td></td><td>1)</td></tr></tbody></table>	Item	Unit	Conditions	Min.	Typ.	Max.	Note	White Luminance ²⁾	[cd/m ²]	h= 90°/v=0°	1200	1500		1)																																																																																																																																																																								
Item	Unit	Conditions	Min.	Typ.	Max.	Note																																																																																																																																																																																																	
White Luminance ²⁾	[cd/m ²]	h= 90°/v=0°	1200	1500		1)																																																																																																																																																																																																	
Item	Unit	Conditions	Min.	Typ.	Max.	Note																																																																																																																																																																																																	
White Luminance ²⁾	[cd/m ²]	h= 90°/v=0°	1200	1500		1)																																																																																																																																																																																																	
	12																																																																																																																																																																																																						
	15	5.2 Backlight Unit¹⁾ 5.2.1 LED Driver¹⁾ Following characteristics are measured under stable condition at 25°C (Room Temperature)¹⁾ <table><thead><tr><th>Symbol</th><th>Parameter</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Units</th><th>Remark</th></tr></thead><tbody><tr><td>V_{DD}</td><td>Input Voltage</td><td>22.5</td><td>24</td><td>24.5</td><td>Vdc</td><td></td></tr><tr><td>I_{DD}</td><td>Input Current</td><td></td><td>2.36</td><td>2.63</td><td>A</td><td>100% Dimming</td></tr><tr><td>P_{LED}</td><td>Power Consumption</td><td></td><td>56.6</td><td>68</td><td>Watt</td><td>100% Dimming</td></tr><tr><td>I_{LED}</td><td>LED Current</td><td></td><td>4</td><td>5</td><td>A</td><td></td></tr><tr><td>O_{LED}</td><td>On Control Voltage</td><td>3</td><td></td><td>5.5</td><td>Vdc</td><td></td></tr><tr><td>O_{LED}</td><td>Off Control Voltage</td><td>6</td><td></td><td>0.5</td><td>Vdc</td><td></td></tr><tr><td>F_{FWM}</td><td>Frame Dimming Frequency</td><td>200</td><td></td><td>200</td><td>Hz</td><td></td></tr><tr><td>F_{FWM}</td><td>High Voltage</td><td>3.0</td><td>3.3</td><td>5.5</td><td>Vdc</td><td></td></tr><tr><td>F_{FWM}</td><td>Low Voltage</td><td>6</td><td></td><td>0.5</td><td>Vdc</td><td></td></tr><tr><td>F_{FWM}</td><td>Dimming Duty 200Hz~400Hz</td><td>5</td><td></td><td>100</td><td>%</td><td></td></tr><tr><td>F_{FWM}</td><td>Dimming Duty 50Hz~200Hz</td><td>15</td><td></td><td>100</td><td>%</td><td></td></tr><tr><td>I_{LED}</td><td>LED Forward Current</td><td></td><td>35</td><td></td><td>mA</td><td>Ta = 25°C</td></tr><tr><td>L_{LED}</td><td>LED Life Time</td><td>50,000</td><td></td><td></td><td>hrs</td><td>Note 4</td></tr></tbody></table> Note 1: Ta means ambient temperature of TFT-LCD module. Note 2: If module is driven by high current or at high ambient temperature & humidity condition, the operating life will be reduced. Note 3: LED light bar structure, (L: 240mm x 120mm / string: 4-pcs LED) Note 4: Definition of life time: Brightness becomes to 50% of its original value. The minimum life time of LED unit is on the condition of I_f = 35 mA and 25±2°C (Room Temperature)	Symbol	Parameter	Min.	Typ.	Max.	Units	Remark	V _{DD}	Input Voltage	22.5	24	24.5	Vdc		I _{DD}	Input Current		2.36	2.63	A	100% Dimming	P _{LED}	Power Consumption		56.6	68	Watt	100% Dimming	I _{LED}	LED Current		4	5	A		O _{LED}	On Control Voltage	3		5.5	Vdc		O _{LED}	Off Control Voltage	6		0.5	Vdc		F _{FWM}	Frame Dimming Frequency	200		200	Hz		F _{FWM}	High Voltage	3.0	3.3	5.5	Vdc		F _{FWM}	Low Voltage	6		0.5	Vdc		F _{FWM}	Dimming Duty 200Hz~400Hz	5		100	%		F _{FWM}	Dimming Duty 50Hz~200Hz	15		100	%		I _{LED}	LED Forward Current		35		mA	Ta = 25°C	L _{LED}	LED Life Time	50,000			hrs	Note 4	5.2 Backlight Unit¹⁾ 5.2.1 LED Driver¹⁾ Following characteristics are measured under stable condition at 25°C (Room Temperature)¹⁾ <table><thead><tr><th>Symbol</th><th>Parameter</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Units</th><th>Remark</th></tr></thead><tbody><tr><td>V_{DD}</td><td>Input Voltage</td><td>22.5</td><td>24</td><td>24.5</td><td>Vdc</td><td></td></tr><tr><td>I_{DD}</td><td>Input Current</td><td></td><td>2.13</td><td>2.58</td><td>A</td><td>100% Dimming</td></tr><tr><td>P_{LED}</td><td>Power Consumption</td><td></td><td>50</td><td>61.2</td><td>Watt</td><td>100% Dimming</td></tr><tr><td>I_{LED}</td><td>LED Current</td><td></td><td>4</td><td>5</td><td>A</td><td></td></tr><tr><td>O_{LED}</td><td>On Control Voltage</td><td>3</td><td></td><td>5.5</td><td>Vdc</td><td></td></tr><tr><td>O_{LED}</td><td>Off Control Voltage</td><td>6</td><td></td><td>0.5</td><td>Vdc</td><td></td></tr><tr><td>F_{FWM}</td><td>Frame Dimming Frequency</td><td>200</td><td></td><td>200</td><td>Hz</td><td></td></tr><tr><td>F_{FWM}</td><td>High Voltage</td><td>3.0</td><td>3.3</td><td>5.5</td><td>Vdc</td><td></td></tr><tr><td>F_{FWM}</td><td>Low Voltage</td><td>6</td><td></td><td>0.5</td><td>Vdc</td><td></td></tr><tr><td>F_{FWM}</td><td>Dimming Duty 200Hz~400Hz</td><td>5</td><td></td><td>100</td><td>%</td><td></td></tr><tr><td>F_{FWM}</td><td>Dimming Duty 50Hz~200Hz</td><td>15</td><td></td><td>100</td><td>%</td><td></td></tr><tr><td>I_{LED}</td><td>LED Forward Current</td><td></td><td>35</td><td></td><td>mA</td><td>Ta = 25°C</td></tr><tr><td>L_{LED}</td><td>LED Life Time</td><td>50,000</td><td></td><td></td><td>hrs</td><td>Note 4</td></tr></tbody></table> Note 1: Ta means ambient temperature of TFT-LCD module. Note 2: If module is driven by high current or at high ambient temperature & humidity condition, the operating life will be reduced. Note 3: LED light bar structure, (L: 240mm x 120mm / string: 4-pcs LED) Note 4: Definition of life time: Brightness becomes to 50% of its original value. The minimum life time of LED unit is on the condition of I_f = 35 mA and 25±2°C (Room Temperature)	Symbol	Parameter	Min.	Typ.	Max.	Units	Remark	V _{DD}	Input Voltage	22.5	24	24.5	Vdc		I _{DD}	Input Current		2.13	2.58	A	100% Dimming	P _{LED}	Power Consumption		50	61.2	Watt	100% Dimming	I _{LED}	LED Current		4	5	A		O _{LED}	On Control Voltage	3		5.5	Vdc		O _{LED}	Off Control Voltage	6		0.5	Vdc		F _{FWM}	Frame Dimming Frequency	200		200	Hz		F _{FWM}	High Voltage	3.0	3.3	5.5	Vdc		F _{FWM}	Low Voltage	6		0.5	Vdc		F _{FWM}	Dimming Duty 200Hz~400Hz	5		100	%		F _{FWM}	Dimming Duty 50Hz~200Hz	15		100	%		I _{LED}	LED Forward Current		35		mA	Ta = 25°C	L _{LED}	LED Life Time	50,000			hrs	Note 4
Symbol	Parameter	Min.	Typ.	Max.	Units	Remark																																																																																																																																																																																																	
V _{DD}	Input Voltage	22.5	24	24.5	Vdc																																																																																																																																																																																																		
I _{DD}	Input Current		2.36	2.63	A	100% Dimming																																																																																																																																																																																																	
P _{LED}	Power Consumption		56.6	68	Watt	100% Dimming																																																																																																																																																																																																	
I _{LED}	LED Current		4	5	A																																																																																																																																																																																																		
O _{LED}	On Control Voltage	3		5.5	Vdc																																																																																																																																																																																																		
O _{LED}	Off Control Voltage	6		0.5	Vdc																																																																																																																																																																																																		
F _{FWM}	Frame Dimming Frequency	200		200	Hz																																																																																																																																																																																																		
F _{FWM}	High Voltage	3.0	3.3	5.5	Vdc																																																																																																																																																																																																		
F _{FWM}	Low Voltage	6		0.5	Vdc																																																																																																																																																																																																		
F _{FWM}	Dimming Duty 200Hz~400Hz	5		100	%																																																																																																																																																																																																		
F _{FWM}	Dimming Duty 50Hz~200Hz	15		100	%																																																																																																																																																																																																		
I _{LED}	LED Forward Current		35		mA	Ta = 25°C																																																																																																																																																																																																	
L _{LED}	LED Life Time	50,000			hrs	Note 4																																																																																																																																																																																																	
Symbol	Parameter	Min.	Typ.	Max.	Units	Remark																																																																																																																																																																																																	
V _{DD}	Input Voltage	22.5	24	24.5	Vdc																																																																																																																																																																																																		
I _{DD}	Input Current		2.13	2.58	A	100% Dimming																																																																																																																																																																																																	
P _{LED}	Power Consumption		50	61.2	Watt	100% Dimming																																																																																																																																																																																																	
I _{LED}	LED Current		4	5	A																																																																																																																																																																																																		
O _{LED}	On Control Voltage	3		5.5	Vdc																																																																																																																																																																																																		
O _{LED}	Off Control Voltage	6		0.5	Vdc																																																																																																																																																																																																		
F _{FWM}	Frame Dimming Frequency	200		200	Hz																																																																																																																																																																																																		
F _{FWM}	High Voltage	3.0	3.3	5.5	Vdc																																																																																																																																																																																																		
F _{FWM}	Low Voltage	6		0.5	Vdc																																																																																																																																																																																																		
F _{FWM}	Dimming Duty 200Hz~400Hz	5		100	%																																																																																																																																																																																																		
F _{FWM}	Dimming Duty 50Hz~200Hz	15		100	%																																																																																																																																																																																																		
I _{LED}	LED Forward Current		35		mA	Ta = 25°C																																																																																																																																																																																																	
L _{LED}	LED Life Time	50,000			hrs	Note 4																																																																																																																																																																																																	
	21	7.2 Backlight Unit: LED Connector¹⁾ <table><thead><tr><th>Connector Name / Designation</th><th>LED Connector</th></tr></thead><tbody><tr><td>Manufacturer</td><td>JST</td></tr><tr><td>Connector Model Number</td><td>S118-PS-S304C-TS(HF)</td></tr><tr><td>Mating Housing Part Number</td><td>PHR-14 or compatible</td></tr></tbody></table>	Connector Name / Designation	LED Connector	Manufacturer	JST	Connector Model Number	S118-PS-S304C-TS(HF)	Mating Housing Part Number	PHR-14 or compatible	7.2 Backlight Unit: LED Connector¹⁾ <table><thead><tr><th>Connector Name / Designation</th><th>LED Connector</th></tr></thead><tbody><tr><td>Manufacturer</td><td>Culpin</td></tr><tr><td>Connector Model Number</td><td>CS114M1HS-NH</td></tr><tr><td>Mating Housing Part Number</td><td>PHR-14 or compatible</td></tr></tbody></table>	Connector Name / Designation	LED Connector	Manufacturer	Culpin	Connector Model Number	CS114M1HS-NH	Mating Housing Part Number	PHR-14 or compatible																																																																																																																																																																																				
Connector Name / Designation	LED Connector																																																																																																																																																																																																						
Manufacturer	JST																																																																																																																																																																																																						
Connector Model Number	S118-PS-S304C-TS(HF)																																																																																																																																																																																																						
Mating Housing Part Number	PHR-14 or compatible																																																																																																																																																																																																						
Connector Name / Designation	LED Connector																																																																																																																																																																																																						
Manufacturer	Culpin																																																																																																																																																																																																						
Connector Model Number	CS114M1HS-NH																																																																																																																																																																																																						
Mating Housing Part Number	PHR-14 or compatible																																																																																																																																																																																																						
1.0 2024/12/10	all	Preliminary Specification	Final Specification																																																																																																																																																																																																				

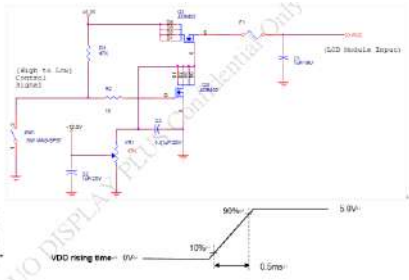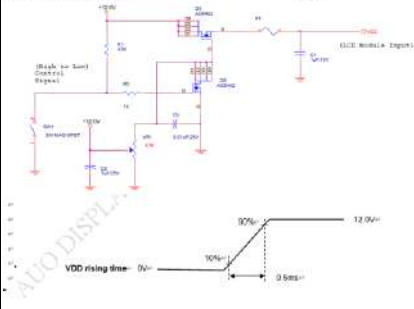1.1 2025/7/1	14		Updated power specification drawing Note 1: Measurement condition:- 	
--------------	----	---	--	--



AUO Display+

Product Specification

AUO-General
G240HVN01.0

1. Operating Precautions

- 1) Since front polarizer is easily damaged, pay attention not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- 5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open or modify the Module Assembly.
- 8) In case if a Module has to be put back into the packing container slot after once it was taken out from the container, take it easily, or the TFT Module may be damaged.
- 9) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 10) After installation of the TFT Module into an enclosure, do not twist nor bend the TFT Module even momentary. At designing the enclosure, it should be taken into consideration that no bending/twisting forces are applied to the TFT Module from outside. Otherwise the TFT Module may be damaged.
- 11) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 12) Severe temperature condition may result in different luminance, response time and LED life time.
- 13) The data on this specification sheet is applicable when LCD module is placed in landscape position.
- 14) Continuous displaying fixed pattern may induce image sticking. It is recommended to use screen saver or shuffle content periodically if fixed pattern is displayed on the screen.

G240HVN01.0. ver. 1.1

2. General Description

This specification applies to the 24 inch-wide Color TFT-LCD Module G240HVN01.0. The display supports the Full HD - 1920(H) x 1080(V) screen format and 16.7M colors (RGB 8-bits data). All input signals are dual channel LVDS interface.

LED driver board is included. G240HVN01.0 is designed for industrial display applications.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

ITEMS	Unit	SPECIFICATIONS
Screen Diagonal	[mm]	609.7(24.0")
Active Area	[mm]	531.36 (H) x 298.89 (V)
Pixels H x V		1920(x3) x 1080
Pixel Pitch	[um]	276.75 (per one triad) ×276.75
Pixel Arrangement		R.G.B. Vertical Stripe
Display Mode		VA Mode, Normally Black
White Luminance (Center)	[cd/m ²]	1500
Contrast Ratio		5000: 1
Optical Response Time	[msec]	25
Nominal Input Voltage VDD	[Volt]	+12.0 V
Power Consumption	[Watt]	55.8 W (Cell: 4.8 + BL: 51) (Typ)@White
Weight	[g]	2,050 (Typ.)+/-200 g
Physical Size	[mm]	558.36(H) x 325.57(V) x 17.8 (D)Typ
Electrical Interface		Dual channel LVDS
Support Color		16.7M colors (true 8-bit)
Surface Treatment		Anti-Glare, 3H
Temperature Range		
Operating	[°C]	-30 to +80
Storage (Shipping)	[°C]	-30 to +80
RoHS Compliance		RoHS Compliance

2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25°C (Room Temperature):

Item	Unit	Conditions	Min.	Typ.	Max.	Note
White Luminance	[cd/m ²]	I _F = 85mA	1200	1500	-	1
Uniformity	%	9 Points	75	80	-	1, 2, 3
Contrast Ratio			3000	5000	-	4
Cross talk	%		-	-	1.5	5
Response Time	[msec]	Rising	-	16		6
		Falling	-	9		
		Rising + Falling	-	25	50	
Viewing Angle	[degree] [degree]	Horizontal (Right) CR = 10 (Left)		85 85	- -	7
	[degree] [degree]	Vertical (Upper) CR = 10 (Lower)		80 80	- -	
Color / Chromaticity Coordinates (CIE 1931)		Red x	0.602	0.652	0.702	
		Red y	0.285	0.335	0.385	
		Green x	0.271	0.321	0.371	
		Green y	0.568	0.618	0.668	
		Blue x	0.101	0.151	0.201	
		Blue y	0.009	0.059	0.109	
		White x	0.263	0.313	0.363	
		White y	0.279	0.329	0.379	
Color Gamut	%	NTSC		72	-	


Note 1: Measurement method

Equipment Pattern Generator, Power Supply, Digital Voltmeter, Luminance meter (SR_3 or equivalent)

Aperture 1" with 50cm viewing distance


Test Point Center

Environment < 1 lux

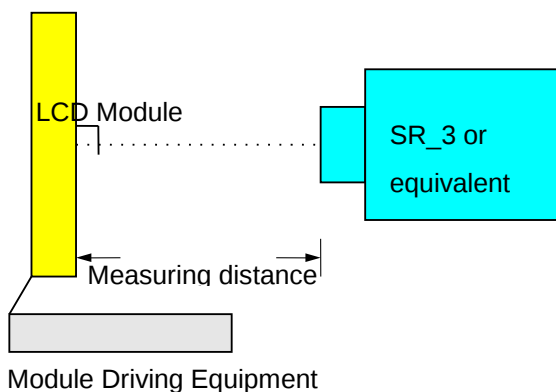

G240HVN01.0. ver. 1.1

Note 2: Definition of 9 points position. Display active area:

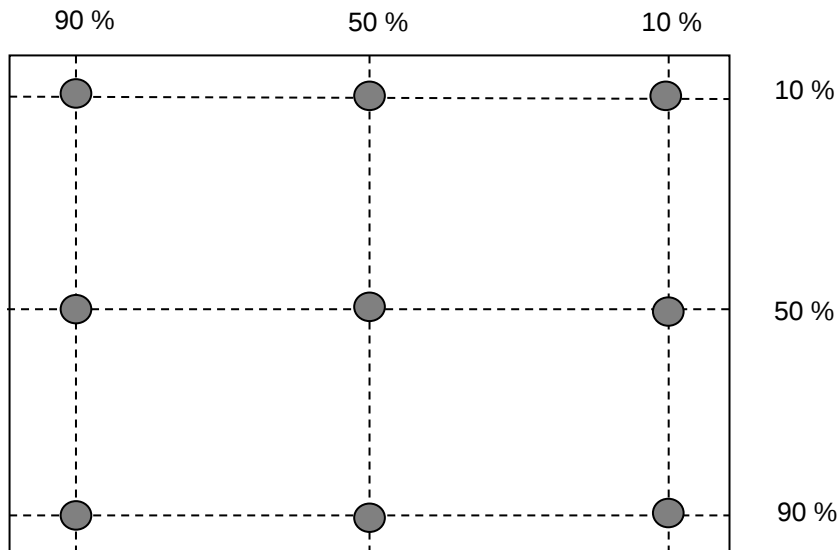

Note 3: The luminance uniformity of 9 points is defined by dividing the minimum luminance values by the maximum test point luminance

$$\delta_{w9} = \frac{\text{Minimum Brightness of nine points}}{\text{Maximum Brightness of nine points}}$$

Note 4 : Definition of contrast ratio (CR):

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "White" state}}{\text{Brightness on the "Black" state}}$$


Note 5 : Definition of cross talk (CT)

$$CT = |YB - YA| / YA \times 100 (\%)$$

Where

YA = Luminance of measured location without gray level 255 pattern (cd/m2)


YB = Luminance of measured location with gray level 255 pattern (cd/m2)

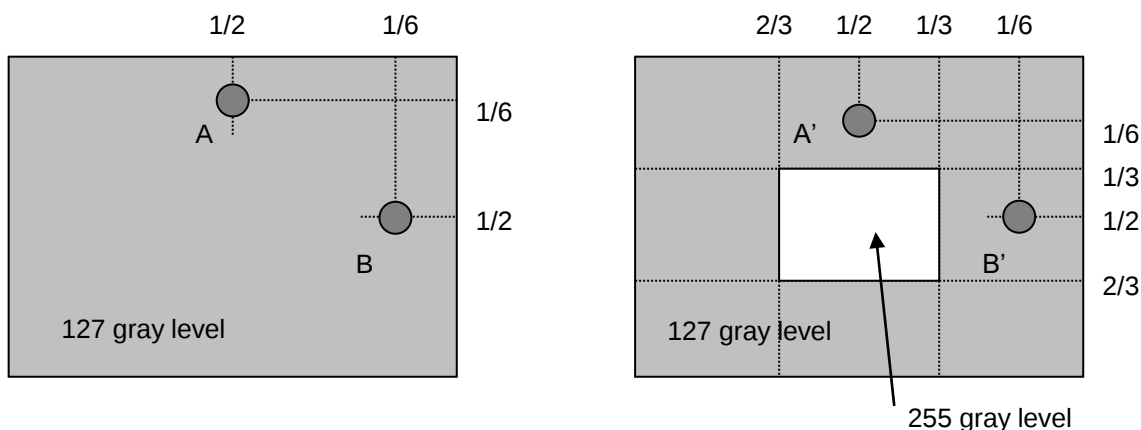

G240HVN01.0. ver. 1.1


Note 6: Definition of response time:

The output signals of photo detector are measured when the input signals are changed from "White" to "Black" (falling time) and from "Black" to "White" (rising time), respectively. The response time interval is between 10% and 90% of amplitudes. Please refer to the figure as below.

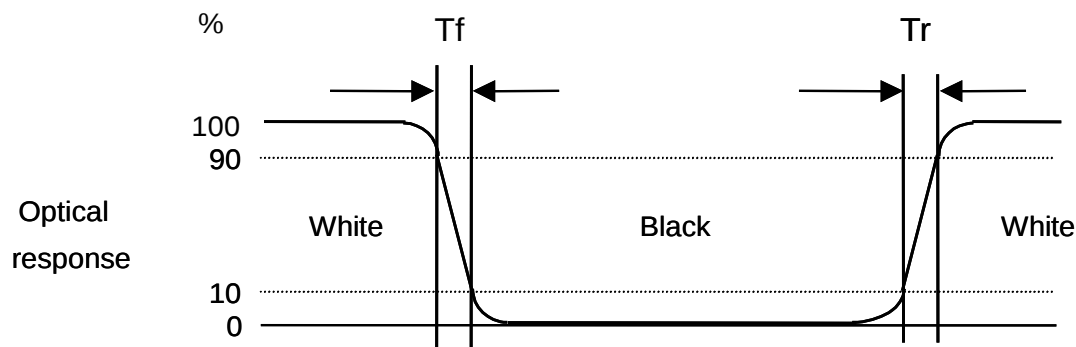


Note 7: Definition of viewing angle

Viewing angle is the measurement of contrast ratio ≥ 10 , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as below: 90° (θ) horizontal left and right, and 90° (Φ) vertical high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated to its center to develop the desired measurement viewing angle.

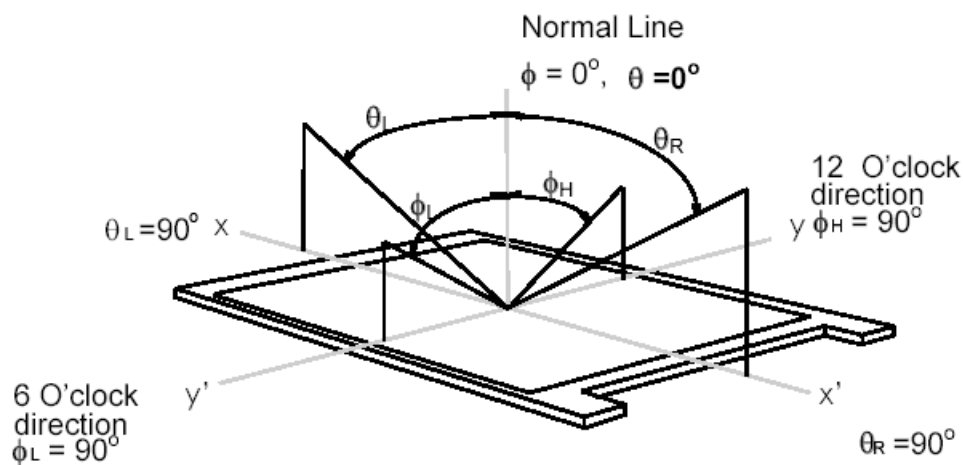

3. Functional Block Diagram

The following diagram shows the functional block of the 24 inches wide Color TFT-LCD Module:

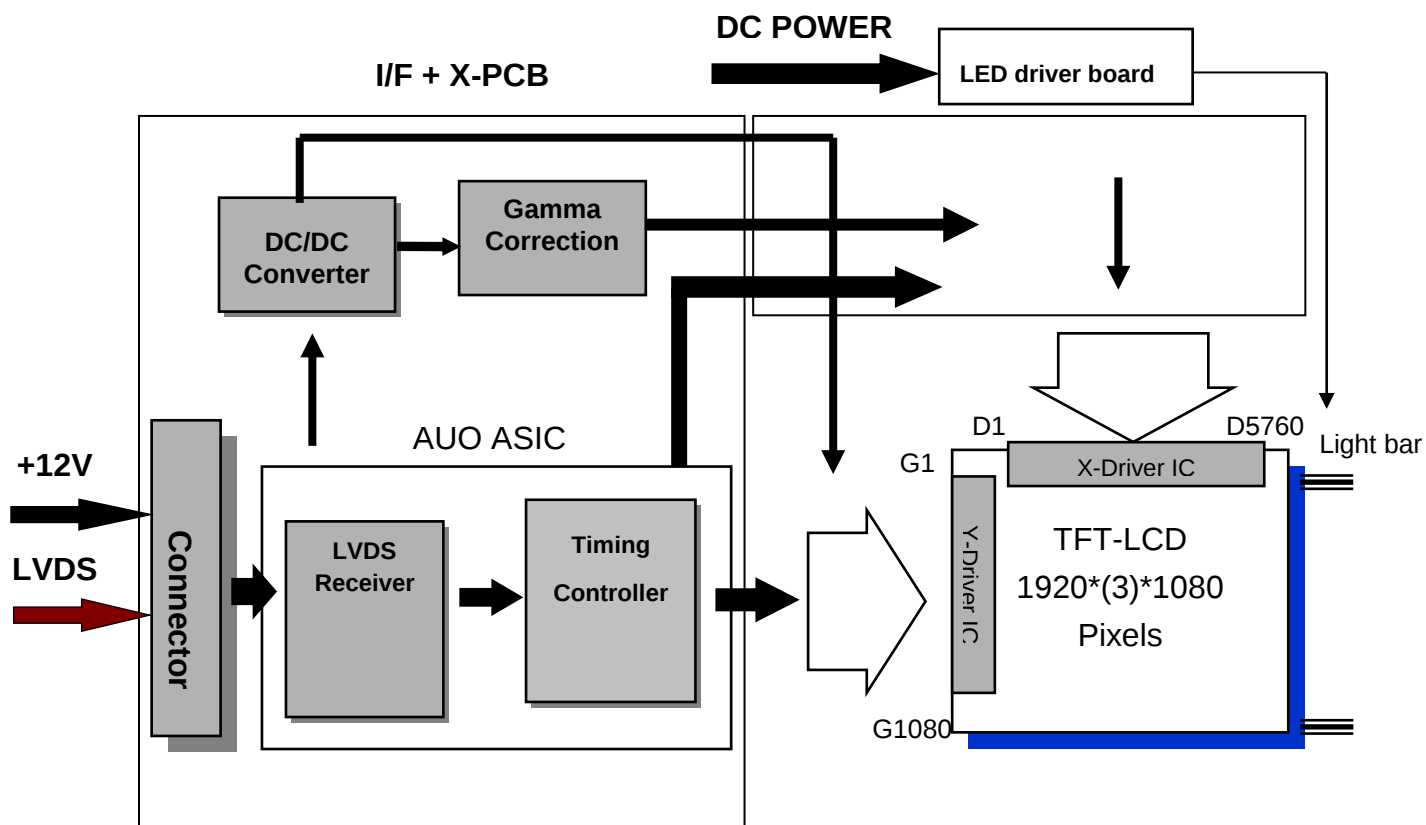

LVDS Connector: SIN SHENG (MSCK2407P30) or equivalent.
BLU Driver Connector: CviLux (CI0114M1HR0-NH) or equivalent.

4. Absolute Maximum Ratings

4.1 TFT LCD Module

Item	Symbol	Min	Max	Unit	Conditions
Logic/LCD Drive Voltage	VDD	GND-0.3	13.2	[Volt]	Note 1,2

4.2 Backlight Unit

Item	Symbol	Min	Max	Unit	Conditions
LED Input Voltage	Vcc	GND-0.3	24.5	[Volt]	Note 1,2

4.3 Absolute Ratings of Environment

Item	Symbol	Min.	Max.	Unit	Conditions
Operating Temperature	TOP	-30	80	[°C]	Note 3
Operation Humidity	HOP	5	90	[%RH]	
Storage Temperature	TST	-30	80	[°C]	
Storage Humidity	HST	5	90	[%RH]	


Note 1: With in Ta (25°C)

Note 2: Permanent damage to the device may occur if exceeding maximum values

Note 3: For quality performance, please refer to AUO IIS(Incoming Inspection Standard).

Note 4: Maximum Wet-Bulb should be 39°C and no condensation.

Note 5: Function judged only.

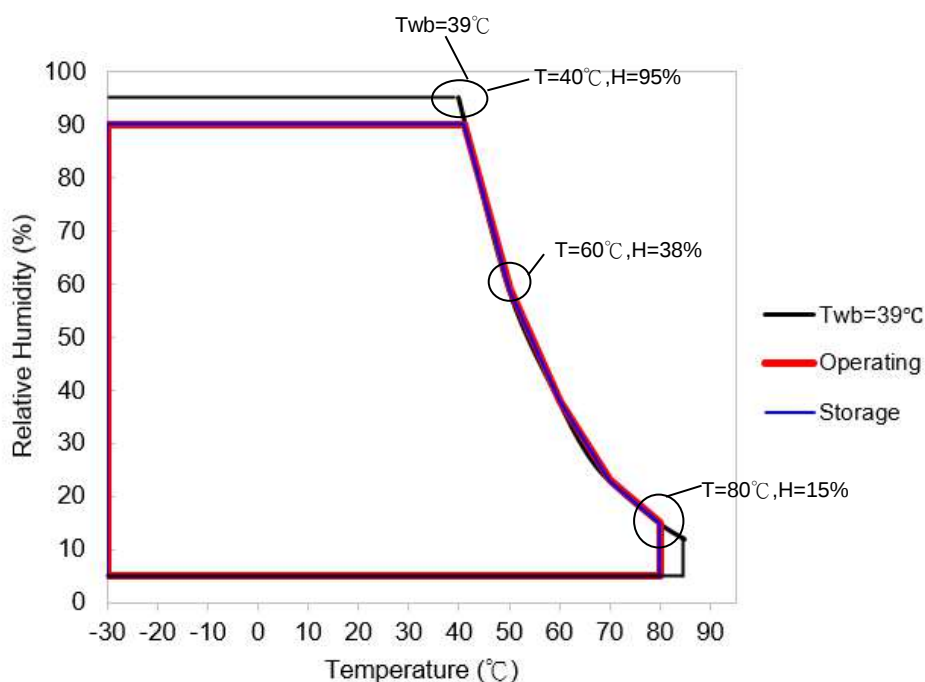



5. Electrical Characteristics

5.1 TFT LCD Module

5.1.1 Power Specification

Symbol	Parameter	Min	Typ	Max	Units	Remark
VDD	Logic/LCD Drive Voltage	10.8	12	13.2	[Volt]	± 10%
IDD	VDD Current	-	400	480	[mA]	VDD= 12V, All White Pattern At 60Hz
Irush	LCD Inrush Current	-	-	3	[A]	Note 1
PDD	VDD Power	-	4.8	5.76	[Watt]	VDD= 12V, All White Pattern At 60Hz

Note 1: Measurement condition:

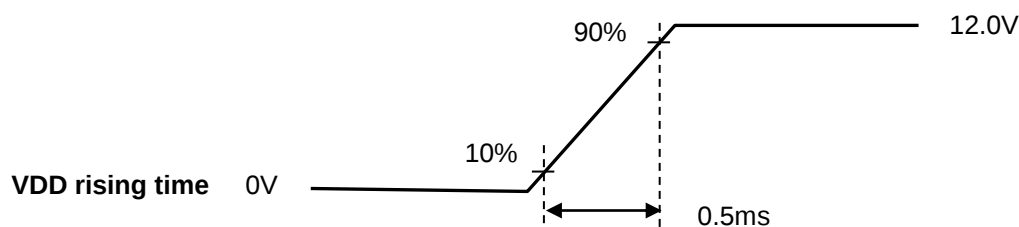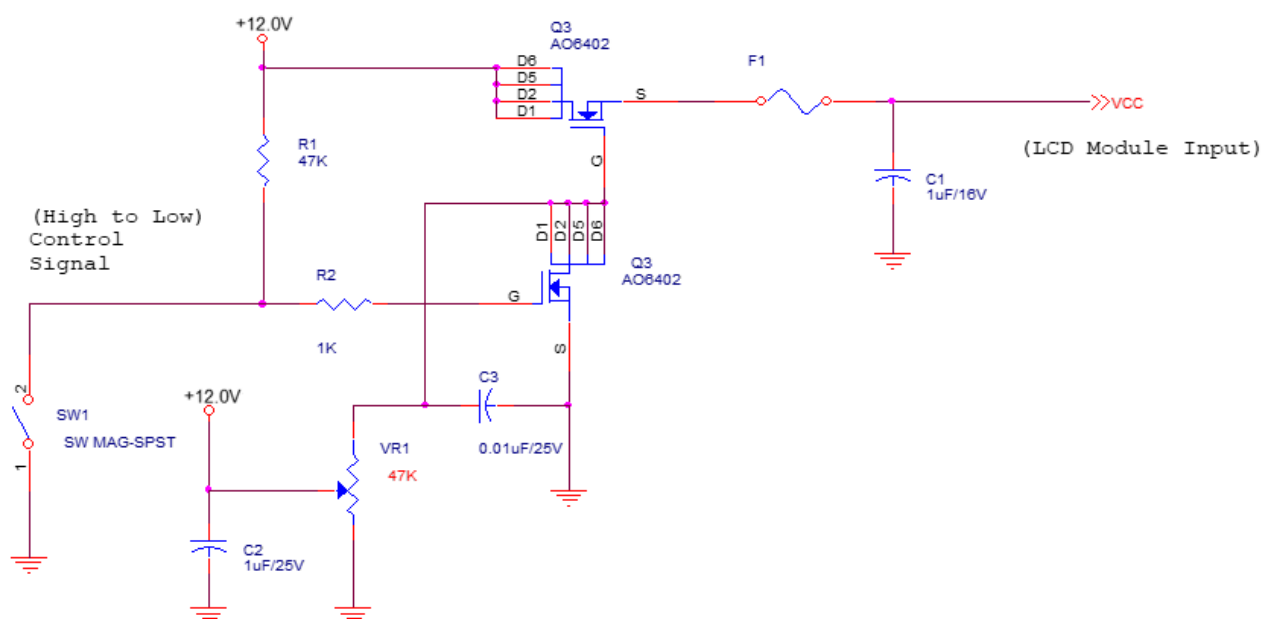


5.1.2 Signal Electrical Characteristics

Input signals shall be low or Hi-Z state when VDD is off.

Symbol	Item	Min.	Typ.	Max.	Unit	Remark
VTH	Differential Input High Threshold	-	-	100	[mV]	VCM=1.2V
VTL	Differential Input Low Threshold	-100	-	-	[mV]	VCM=1.2V
VID	Input Differential Voltage	100	400	600	[mV]	
VICM	Differential Input Common Mode Voltage	0.3	-	1.25	[V]	VTH/VTL=±100mV

Note: LVDS Signal Waveform.

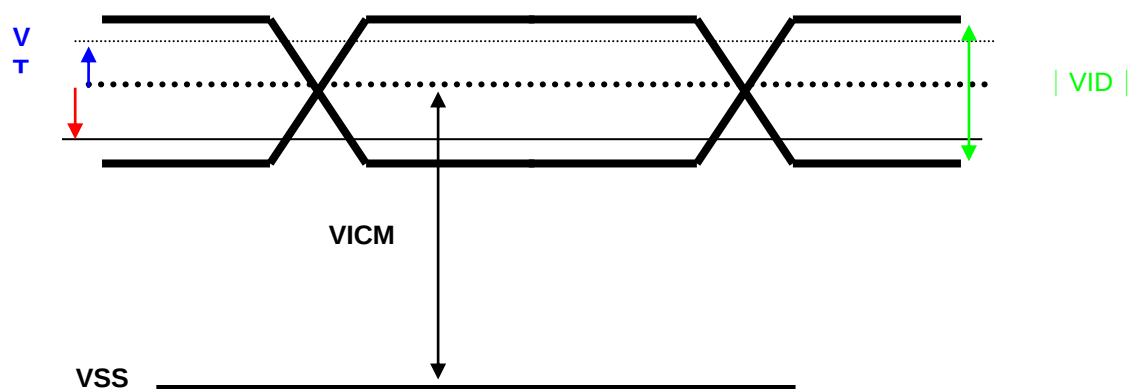

5.2 Backlight Unit

5.2.1 LED Driver

Following characteristics are measured under stable condition at 25°C(Room Temperature).

Symbol	Parameter	Min	Typ	Max	Units	Remark
Vcc	Input Voltage	23.5	24	24.5	Volt	
Ivcc	Input Current	-	2.13	2.55	A	100% Dimming
PLED	Power Consumption		51	61.2	Watt	100% Dimming
Irush	Inrush Current	-	4	5	A	
BL_EN	On Control Voltage	3	-	5.5	Volt	
	Off Control Voltage	0	-	0.5	Volt	
FPWM	PWM Dimming Frequency	200	-	20K	Hz	
	High Voltage	3.0	3.3	5.5	Volt	
	Low Voltage	0	-	0.5	Volt	
	Dimming Duty 200Hz~5KHz	5		100	%	
	Dimming Duty 5KHz~20KHz	15	-	100	%	
I _F	LED Forward Current		85		mA	Ta = 25°C
LTLED	LED Life Time	50,000	-	-	Hrs	Note 4

Note 1: Ta means ambient temperature of TFT-LCD module

Note 2: If module is driven by high current or at high ambient temperature & humidity condition. The operating life will be reduced.

Note 3: LED light bar structure: (7 strings x 12pcs / string =84pcs LED)

Note 4: Definition of life time: Brightness becomes to 50% of its original value. The minimum life time of LED unit is on the condition of I_F = 85 mA and 25±2°C (Room Temperature)



AUO Display+

Product Specification

AUO-General
G240HVN01.0


6.2 Signal Description

The module using a pair of LVDS receiver SN75LVDS82(Texas Instruments) or compatible. LVDS is a differential signal technology for LCD interface and high speed data transfer device. Transmitter shall be SN75LVDS83(negative edge sampling) or compatible. The first LVDS port(RxOxxx) transmits odd pixels while the second LVDS port(RxExxx) transmits even pixels.

PIN #	SIGNAL NAME	DESCRIPTION
1	RXinO0-	Negative LVDS differential data input (Odd data)
2	RXinO0+	Positive LVDS differential data input (Odd data)
3	RXinO1-	Negative LVDS differential data input (Odd data)
4	RXinO1+	Positive LVDS differential data input (Odd data)
5	RXinO2-	Negative LVDS differential data input (Odd data, H-Sync, V-Sync, DSPTMG)
6	RXinO2+	Positive LVDS differential data input (Odd data, H-Sync, V-Sync, DSPTMG)
7	GND	Power Ground
8	RxOCLKIN-	Negative LVDS differential clock input (Odd clock)
9	RxOCLKIN+	Positive LVDS differential clock input (Odd clock)
10	RXinO3-	Negative LVDS differential data input (Odd data)
11	RXinO3+	Positive LVDS differential data input (Odd data)
12	RXinE0-	Negative LVDS differential data input (Even data)
13	RXinE0+	Positive LVDS differential data input (Even data)
14	GND	Power Ground
15	RXinE1-	Negative LVDS differential data input (Even data)
16	RXinE1+	Positive LVDS differential data input (Even data)
17	GND	Power Ground
18	RXinE2-	Negative LVDS differential data input (Even data)
19	RXinE2+	Positive LVDS differential data input (Even data)
20	RxECLKIN-	Negative LVDS differential clock input (Even clock)
21	RxECLKIN+	Positive LVDS differential clock input (Even clock)
22	RXinE3-	Negative LVDS differential data input (Even data)
23	RXinE3+	Positive LVDS differential data input (Even data)
24	GND	Power Ground
25	NC	No connection (for AUO test only. Do not connect)
26	NC	No connection (for AUO test only. Do not connect)
27	NC	No connection (for AUO test only. Do not connect)
28	VDD	Power Supply Input Voltage
29	VDD	Power Supply Input Voltage
30	VDD	Power Supply Input Voltage

G240HVN01.0. ver. 1.1

6.3 The Input Data Format

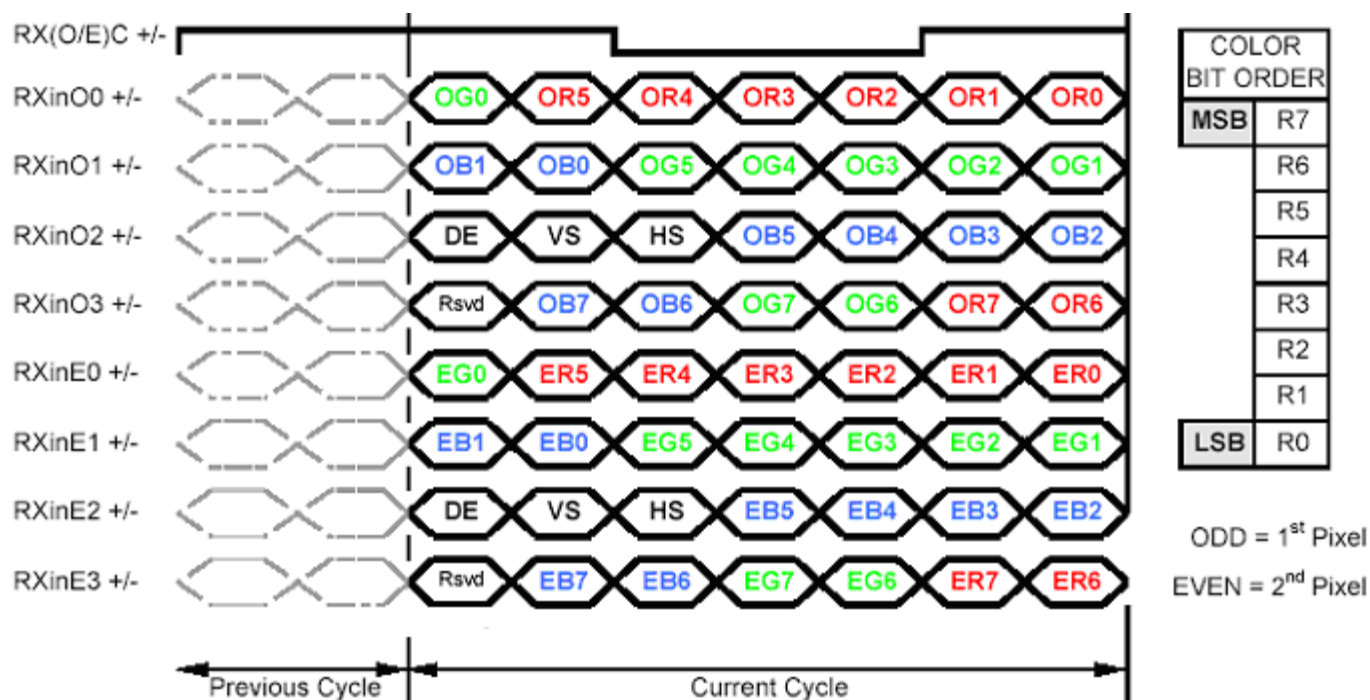

Note1: 8-bits signal input.

Note2: L:NS alike H:Thine alike


6.4 Interface Timing

6.4.1 Timing Characteristics

Signal	Item	Symbol	Min	Typ	Max	Unit
Clock	Frequency	$1/T_{\text{Clock}}$	40	72	83	MHz
Frame Rate	Frequency	$1/T_v$	50	60	75	Hz
Vertical Section	Period	T_v	1088	1120	2047	T_line
	Active	T_{vD}	1080	1080	1080	
	Blanking	T_{vB}	8	40	967	
Horizontal Section	Period	T_H	1034	1060	2047	T_clock
	Active	T_{HD}	960	960	960	
	Blanking	T_{HB}	74	100	1087	


Note: DE mode only.

6.4.2 Input Timing Diagram

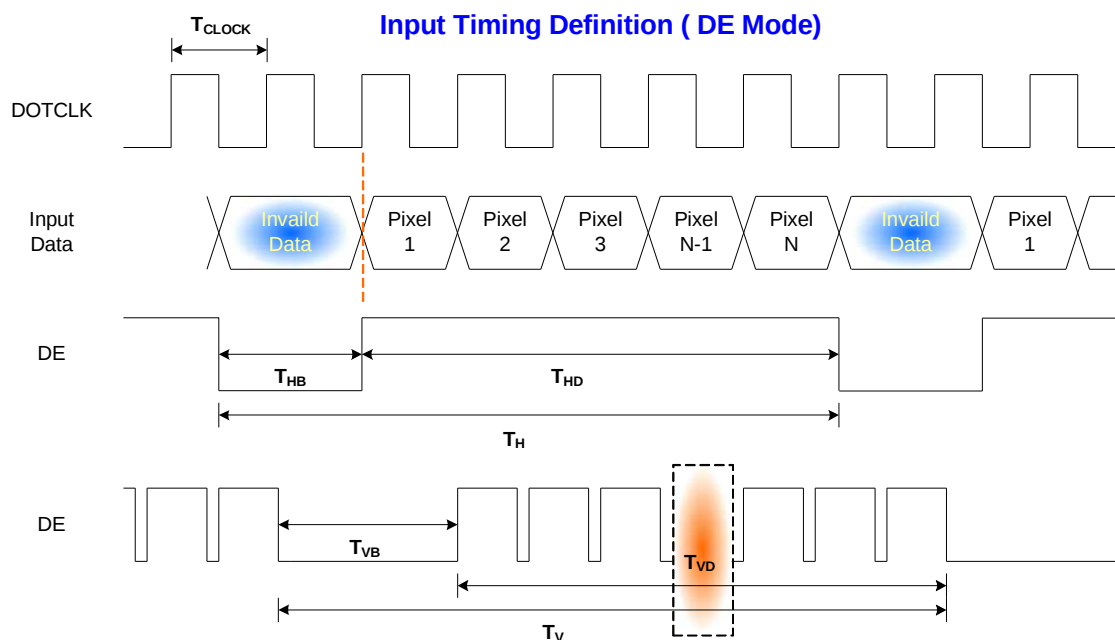

6.5 Power ON/OFF Sequence

VDD power and B/L on/off sequence is as below. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off.

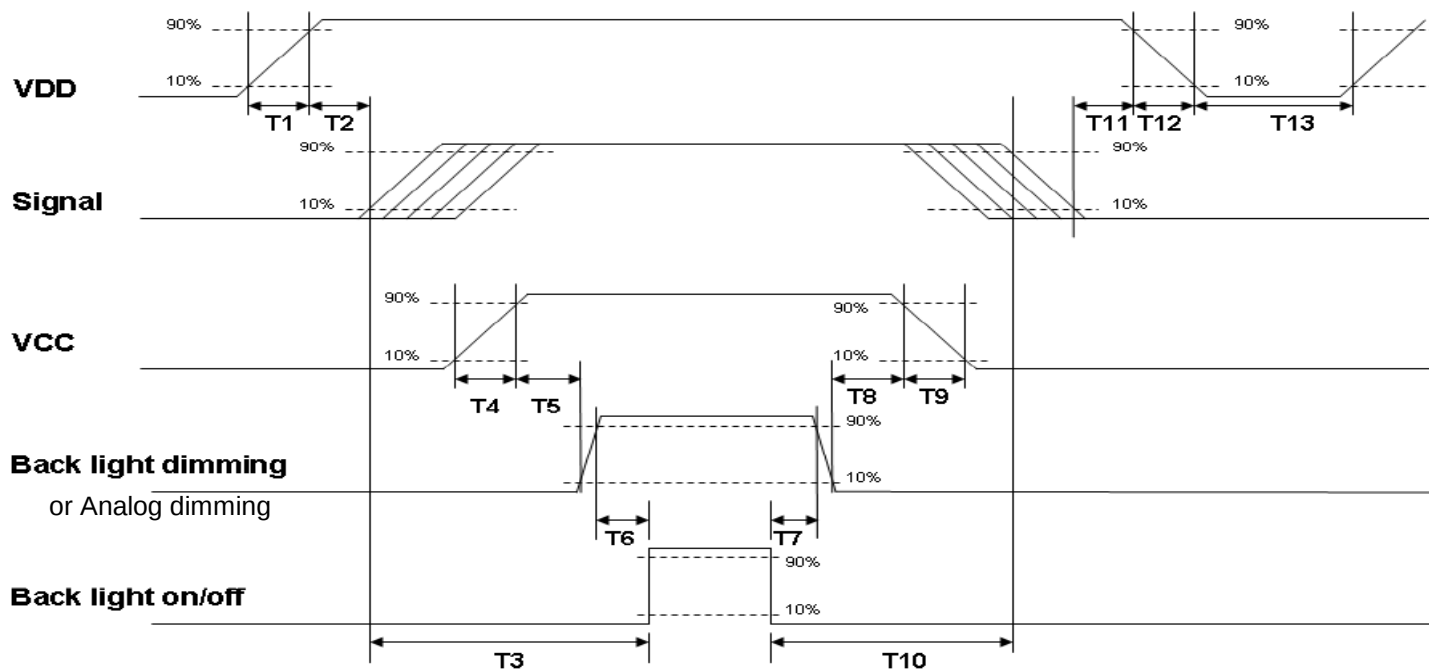

Power ON/OFF sequence timing

Parameter	Value			Units
	Min.	Typ.	Max.	
T1	0.5	--	10	[ms]
T2	30	40	50	[ms]
T3	200	--	--	[ms]
T4	0.5	--	10	[ms]
T5	10	--	--	[ms]
T6	10	--	--	[ms]
T7	0	--	--	[ms]
T8	10	--	--	[ms]
T9	--	--	10	[ms]
T10	110	--	--	[ms]
T11	0	16	50	[ms]
T12	--	--	10	[ms]
T13	1000	--	--	[ms]

The above on/off sequence should be applied to avoid abnormal function in the display. Please make sure to turn off the power when you plug the cable into the input connector or pull the cable out of the connector.


7. Connector & Pin Assignment

Physical interface is described as for the connector on module. These connectors are capable of accommodating the following signals and will be following components.

7.1 TFT LCD Module: LVDS Connector

Connector Name / Designation	Interface Connector / Interface card
Manufacturer	SIN SHENG or compatible
Type Part Number	SIN SHENG (MSCK2407P30) or equivalent.
Mating Housing Part Number	FI-X30HL (JAE) or compatible


Pin#	Signal Name	Pin#	Signal Name
1	RxOIN0-	2	RxOIN0+
3	RxOIN1-	4	RxOIN1+
5	RxOIN2-	6	RxOIN2+
7	GND	8	RxOCLKIN-
9	RxOCLKIN+	10	RxOIN3-
11	RxOIN3+	12	RxEIN0-
13	RxEIN0+	14	GND
15	RxEIN1-	16	RxEIN1+
17	GND	18	RxEIN2-
19	RxEIN2+	20	RxECLKIN-
21	RxECLKIN+	22	RxEIN3-
23	RxEIN3+	24	GND
25	NC	26	NC
27	NC	28	VDD
29	VDD	30	VDD

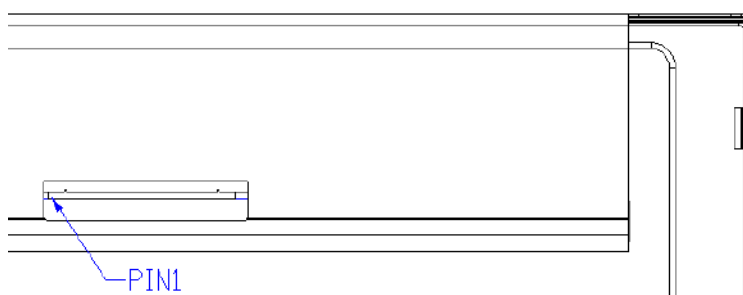

7.2 Backlight Unit: LED Connector

Connector Name / Designation	LED Connector
Manufacturer	CviLux
Connector Model Number	CI0114M1HR0-NH
Mating Housing Part Number	PHR-14 or compatible

Pin #	Symbol	Pin Description
1	VDD	Power +24V
2	VDD	Power +24V
3	VDD	Power +24V
4	VDD	Power +24V
5	VDD	Power +24V
6	GND	GND
7	GND	GND
8	GND	GND
9	GND	GND
10	GND	GND
11	NC	Do not connect
12	EN	Enable(0V:disable, 2.5~5V:Enable)
13	Dimming	PWM; duty 10%~ 100%
14	NC	Do not connect

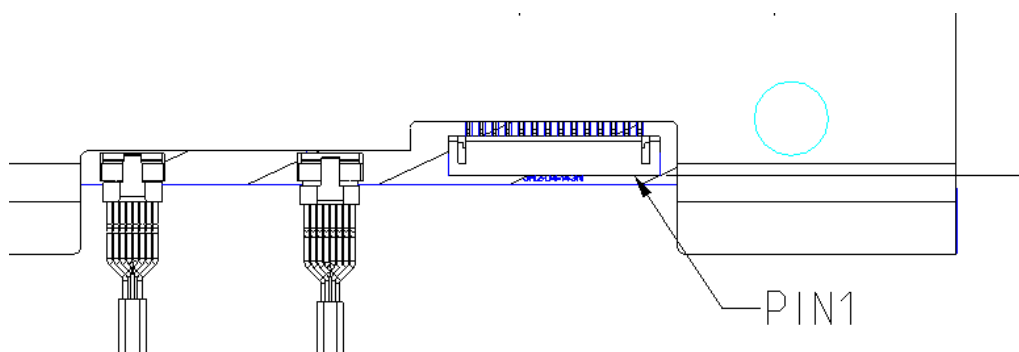

8. Reliability Test

Environment test conditions are listed as following table.


Items	Required Condition	Note
Temperature Humidity Bias (THB)	Ta= 50°C , 80%RH, 300hours	
High Temperature Operation (HTO)	Ta= 80°C, 300hours	
Low Temperature Operation (LTO)	Ta= -30°C, 300hours	
High Temperature Storage (HTS)	Ta= 80°C, 300hours	
Low Temperature Storage (LTS)	Ta= -30°C, 300hours	
Vibration Test (Non-operation)	Acceleration: 1.5 Grms Wave: Random Frequency: 10 - 200 Hz Duration: 30 Minutes each Axis (X, Y, Z)	
Shock Test (Non-operation)	Acceleration: 50 G Wave: Half-sine Active Time: 20 ms Direction: ±X, ±Y, ±Z (one time for each Axis)	
Drop Test	Height: 46 cm, package test	
Thermal Shock Test (TST)	-20°C/30min, 60°C/30min, 100 cycles	
On/Off Test	On/10sec, Off/10sec, 30,000 cycles	
ESD (Electro Static Discharge)	Contact Discharge: ± 8KV, 150pF(330Ω) 1sec, 8 points, 25 times/ point.	1
	Air Discharge: ± 15KV, 150pF(330Ω) 1sec 8 points, 25 times/ point.	
Altitude Test	Operation:10,000 ft Non-Operation:30,000 ft	


Note 1: According to EN61000-4-2, ESD class B: Some performance degradation allowed. No data lost Self-recoverable.
No hardware failures.

Note2:

- Water condensation is not allowed for each test items.
- Each test is done by new TFT-LCD module. Don't use the same TFT-LCD module repeatedly for reliability test.
- The reliability test is performed only to examine the TFT-LCD module capability.
- To inspect TFT-LCD module after reliability test, please store it at room temperature and room humidity for 24 hours at least in advance.
- No function failure occurs.


9. Mechanical Characteristics

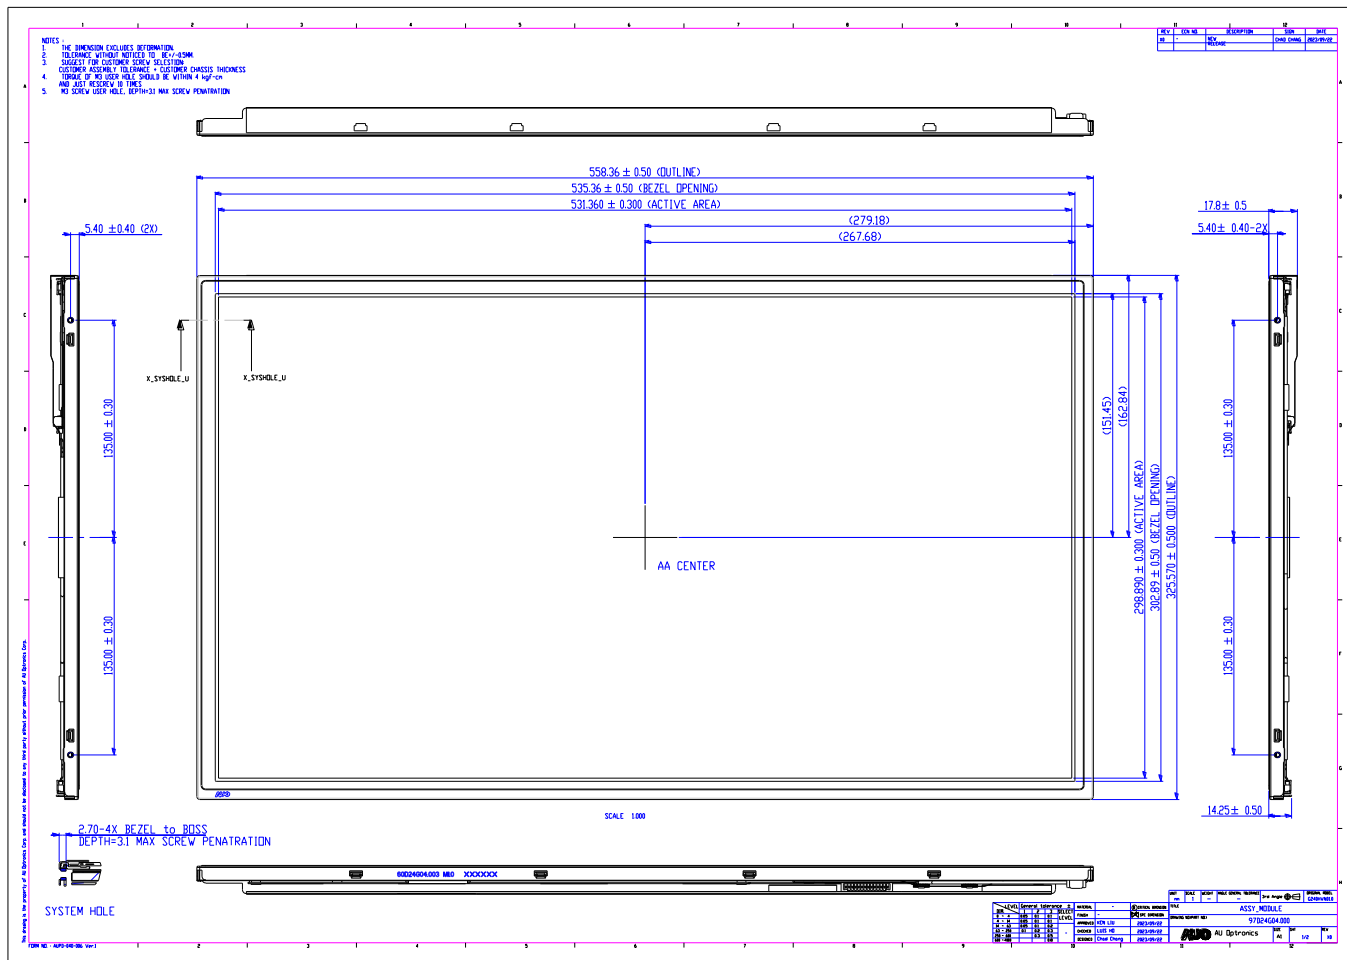

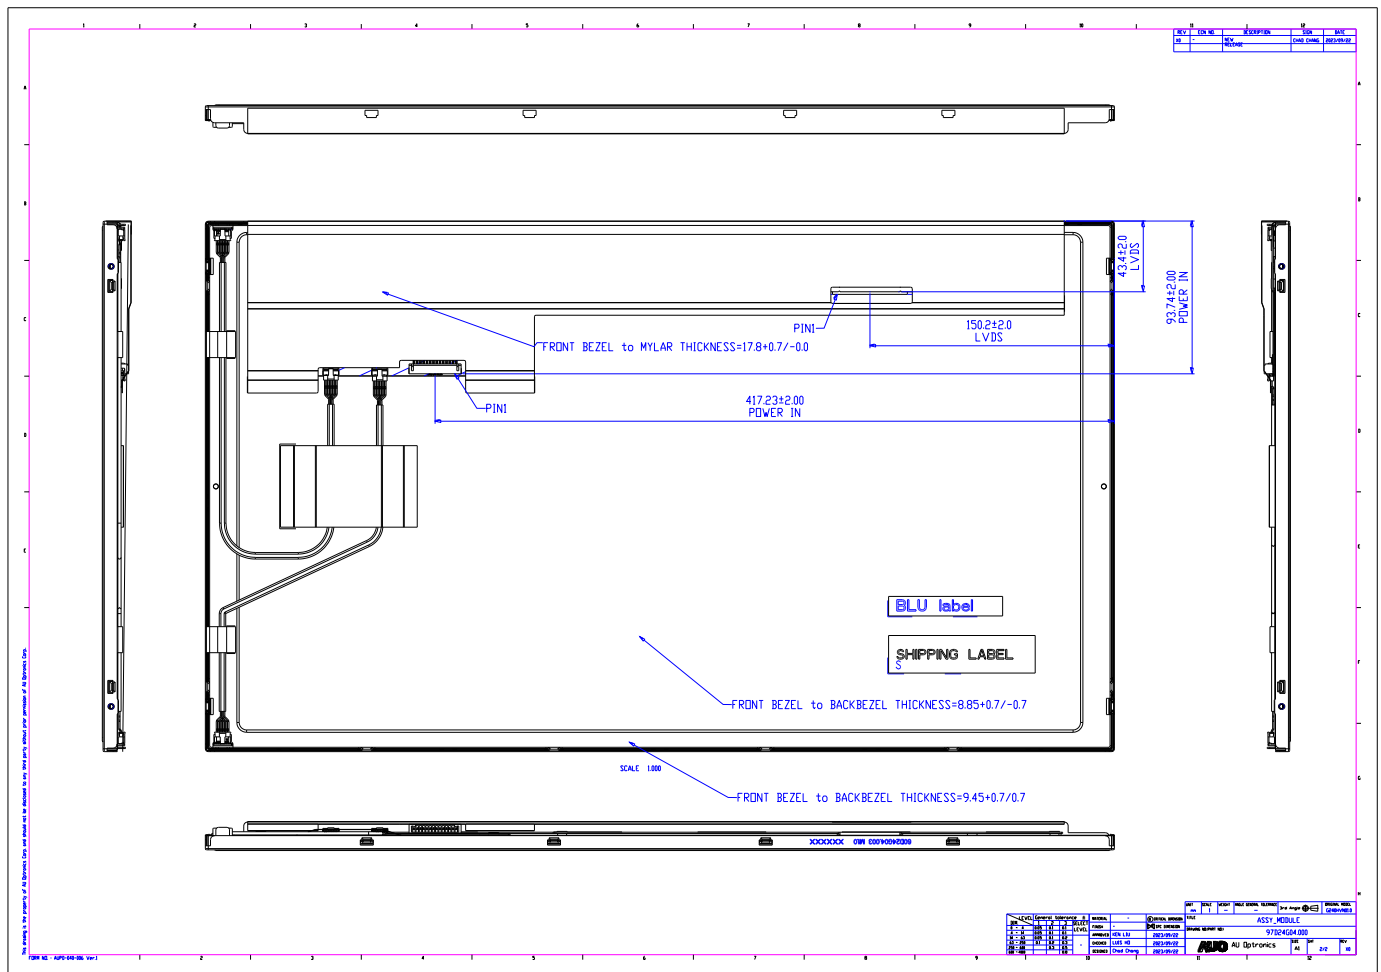


10. Label and Packaging

10.1 Shipping Label (on the rear side of TFT-LCD display)

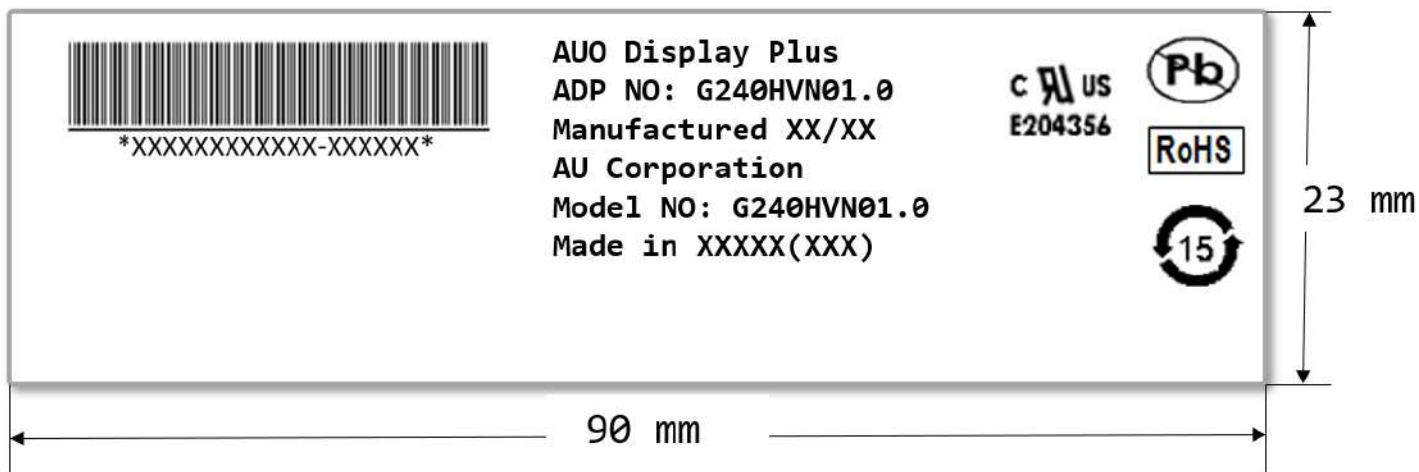

10.2 Carton Package

- The outside dimension of carton is 413 x 282x 661 (mm).
- 8 pieces per carton box.
- 2*4 boxes per layer. By air, 2 layer / pallet. By sea, refer packing documents. Pallet size (not include carton boxes): 1150 mm * 840 mm * 132 mm

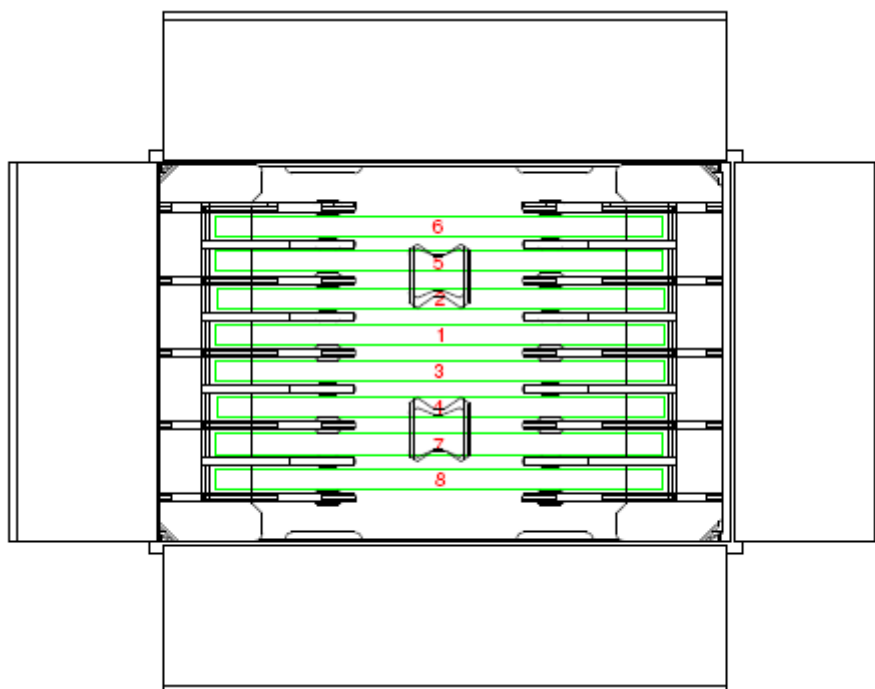



AUO Display+

Product Specification

AUO-General
G240HVN01.0

11. Safety

11.1 Sharp Edge Requirements

There will be no sharp edges or comers on the display assembly that could cause injury.

11.2 Materials

11.2.1 Toxicity

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible AUO toxicologist.

11.2.2 Flammability

The printed circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be printed on the printed circuit board.

11.3 Capacitors

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

11.4 International Safety Standard Compliance

The TFT-LCD module will satisfy all requirements for compliance to:IEC/UL 62368-I